



BEDDING BOX


V-CAT SERIES

Cattle Feeding Equipment & Solutions

[Return to Website Click Here](#)



BEDDING BOX - V-CAT FREESTALL FILLER DIAGRAM

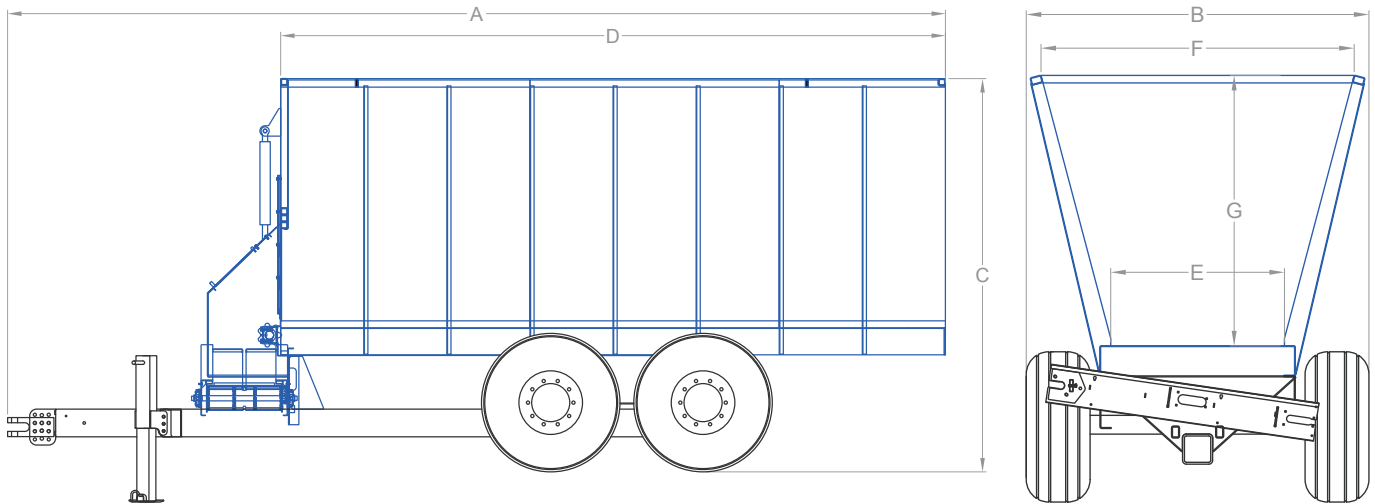

UNIT SPECIFICATIONS

DESCRIPTION	VC1005P	VC1205P	VC1405P	VC1605P	VC1606P	VC1806P	VC2006P
BASE WIDTH	48" WIDE	48" WIDE	48" WIDE	48" WIDE	52" WIDE	52" WIDE	52" WIDE
CAPACITY (CU.FT)	235 CU.FT.	282 CU.FT.	329 CU.FT.	376 CU.FT.	514 CU.FT.	579 CU.FT.	643 CU.FT.
A OVERALL LENGTH	16'-6"	18'-6"	20'-6"	22'-6"	22'-6"	24'-6"	26'-6"
B OVERALL WIDTH	6'-7"	6'-7"	6'-7"	6'-7"	7'-7"	7'-7"	7'-7"
C OVERALL HEIGHT	8'-4"	8'-4"	8'-4"	8'-4"	9'-6"	9'-6"	9'-6"
D CHAMBER LENGTH	10'	12'	14'	16'	16'	18'	20'
E CHAMBER BASE WIDTH	42" @ BASE	42" @ BASE	42" @ BASE	42" @ BASE	46" @ BASE	46" @ BASE	46" @ BASE
F CHAMBER TOP WIDTH	73" @ TOP	73" @ TOP	73" @ TOP	73" @ TOP	83" @ TOP	83" @ TOP	83" @ TOP
G CHAMBER HEIGHT	5'	5'	5'	5'	6'	6'	6'

*12-16.5 Life Master Tires For 48" Base. 16.5L-16.1 Implement Tire For 52" Base.

Performance, Longevity
& Quality Service

Made in
the U.S.A



Call Today 209-722-4146

[Return to Website Click Here](#)



BEDDING BOX - V-CAT FREESTALL FILLER


STANDARD EQUIPMENT

1. Single ADR Square Axle
2. Tires: (4) Super Singles 385 / 65R / 22.5
3. (*) Tandem Axles With Walking Beam Suspension
4. Tires: (8) Duals 275 / 70R / 22.5
5. 20" Wide Discharge Belt
6. Discharge on Right Hand Side
7. Discharge Driven by Tractor PTO
8. Floor Hydraulically Driven (RH232 Gear Drive)
9. WR78 Big Barrel Floor Chain
10. Swinging Door
11. 10K Lbs. Jack & Adjustable Hitch
12. Painted Laird White With Blue Trim

[**Return to Website Click Here**](#)



BEDDING BOX - V-CAT SAND FILLER DIAGRAM

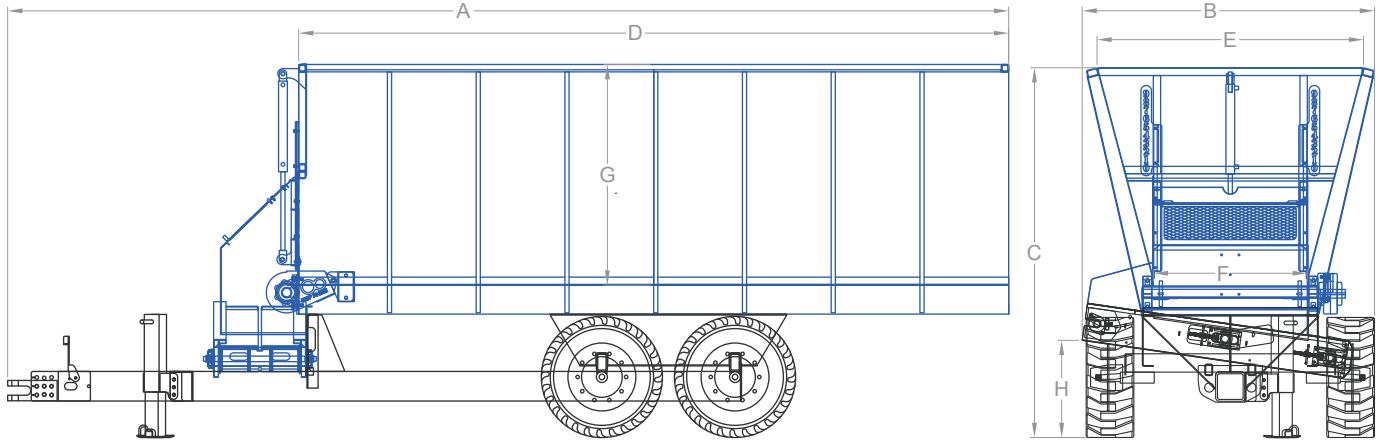

UNIT SPECIFICATIONS

	DESCRIPTION	V-CAT 1005	V-CAT 1205	V-CAT 1405	V-CAT 1605	V-CAT 1805	V-CAT 2005
	NUMBER OF AXLES	1	1	2	2	2	2
	CAPACITY (CU.YD)	8.70	10.40	12.10	13.80	15.50	17.20
A	OVERALL LENGTH	16'-6"	18'-6"	20'-6"	22'-6"	24'-6"	26'-6"
B	OVERALL WIDTH	80"	80"	80"	80"	80"	80"
C	OVERALL HEIGHT	101"	101"	101"	101"	101"	101"
D	CHAMBER LENGTH	10'	12'	14'	16'	18'	20'
E	CHAMBER TOP WIDTH	72.5"	72.5"	72.5"	72.5"	72.5"	72.5"
F	CHAMBER BOTTOM WIDTH	42"	42"	42"	42"	42"	42"
G	CHAMBER DEPTH	5'	5'	5'	5'	5'	5'
H	DISCHARGE CLEARANCE	26"	26"	26"	26"	26"	26"

*12x16.5 Life Master 12Ply Tires 4x.

Performance, Longevity
& Quality Service

Made in
the U.S.A



Call Today 209-722-4146

Return to Website Click Here



BEDDING BOX - V-CAT SAND FILLER

STANDARD EQUIPMENT

1. Single ADR Square Axle
2. Tires: (4) Super Singles 385 / 65R / 22.5
3. (*) Tandem Axles With Walking Beam Suspension
4. Tires: (8) Duals 275 / 70R / 22.5
5. 20" Wide Discharge Belt
6. Discharge on Right Hand Side
7. Discharge Driven by Tractor PTO
8. Floor Hydraulically Driven (RH232 Gear Drive)
9. Manual Flow Control For Floor
10. WR78 Big Barrel Floor Chain
11. Vertical Hydraulic Sand Door With Metering Gauge
12. Discharge Parts Made From Stainless Steel
13. 10K Lbs. Jack & Adjustable Hitch
14. Painted Laird White With Blue Trim

[**Return to Website Click Here**](#)





Cattle Feeding Equipment & Solutions

531 S. Hwy. 59 | Merced, CA 95341
P: (209) 722-4145 | F: (209) 349-8934 | sales@lairdmfg.com | www.lairdmfg.com

[Return to Website Click Here](http://www.lairdmfg.com)