




Cattle Feeding Equipment & Solutions

SHE THE EXCENTION OF TH


Return to Website Click Here

BELT CONVEYORS DIAGRAM

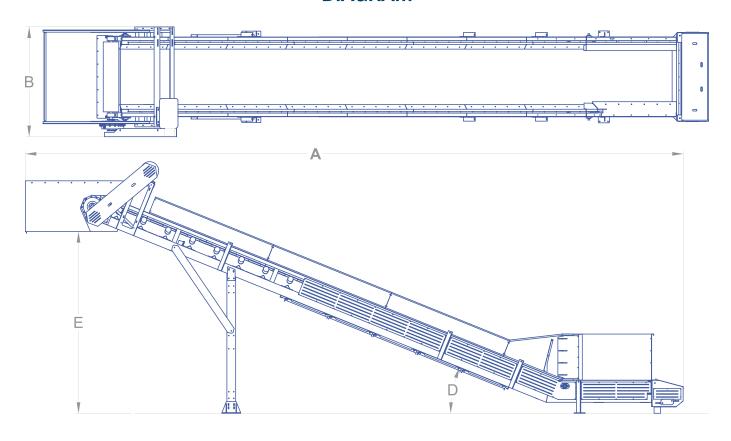

UNIT SPECIFICATIONS

	DOGLEG CONVEYOR	EXAMPLE	
	UNIT SIZE	CVD0546	CVD05XX
A	OVERALL LENGTH	600.00	DETERMINED BY D & E
В	OVERALL WIDTH	99.00	99.00
C	OVERALL HEIGHT	229.00	DETERMINED BY D & E
D	DEGREE OF CONVEYOR	22	17°-24°
E	DROP ZONE CLEARANCE	165.50	96-180
	MOTOR HP	50	50



Performance, Longevity 8 Quality Service the U.S.A Call Today 209-722-4146



BELT CONVEYORS *STANDARD EQUIPMENT*

- 1. Constructed from 8" Channel Frame
- 2. 50hp | 1175 RPM High Torque | TEFC Elec. Motors
- 3. Dodge Speed Reducer With Backstop
- 4. 14" Diameter Rubber-Lagged Head Roller
- 5. 12" Diameter Wing Type Tail Roller
- 6. V-Belt Drive With 9" Pulleys
- 7. Belt Tracking Roller Trainer
- 8. Prices DO NOT Include Installation & Electrical Hookup
- 9. Min Length Available 35Ft. | Max Length Available 70Ft.
- 10. D5 Unequal Trough & Carrier Rollers (60" Belt)
- 11. Disc Urethane Return Rollers
- 12. Full Length Receiving Hopper With Flashing
- 13. Wind Guard & Hood at Drive End
- 14. Guide Rollers & Full Length Skirt Boards
- 15. 2 PLY 220 3/1 With 5/8" Chevron Belt
- 16. Polyeurethane Pinch Rollers
- 17. Preferred Angle of Incline 17-22 Degrees With 14Ft. Of Clearance
- 18. Model determined by dimensions (Example: 5 Ft. wide dogleg conveyor that's 50Ft. Long = CVD-0550)





531 S. Hwy. 59 | Merced, CA 95341 P: (209) 722-4145 | F: (209) 349-8934 | sales@lairdmfg.com | www.lairdmfg.com