



VERTICAL TRAILER MOUNT MIXERS

TRIPLE AUGER SERIES



Cattle Feeding Equipment & Solutions


[Return to Website Click Here](#)



VR-1444DD VERTICAL MIXER TRAILER-MOUNT


(TRIPLE AUGER)

VR-1444DD DIAGRAM

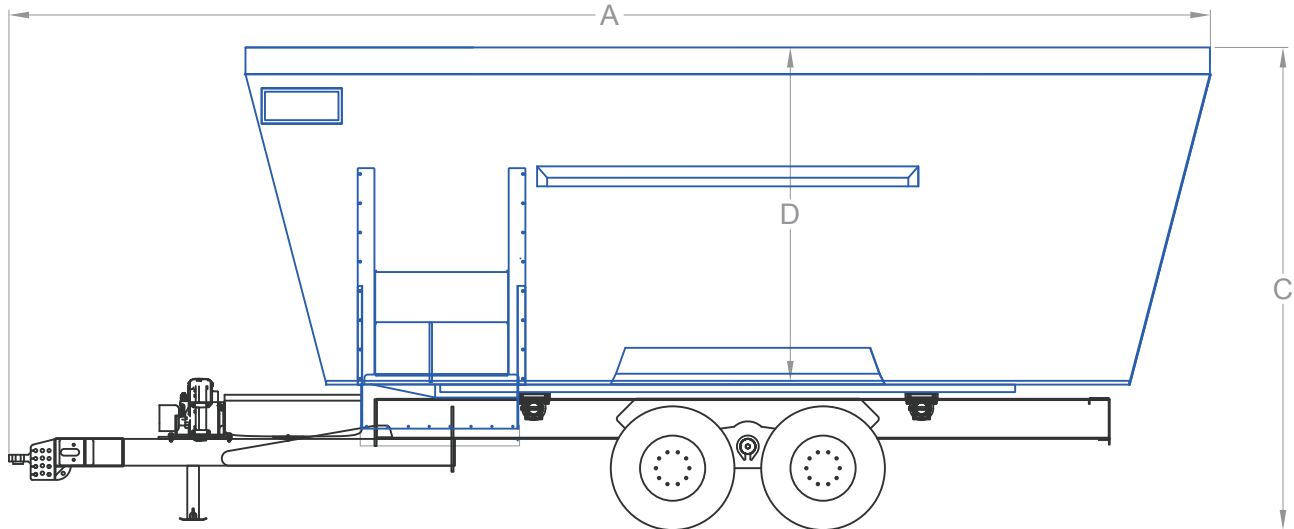

UNIT SPECIFICATIONS	
NUMBER OF AUGERS	3
VOLUME (CU.FT.)	1390
MAX LOAD @ 25LBS/CU.FT.	34750
A OVERALL LENGTH	359.50"
B OVERALL WIDTH SIDE DOORS	135.00"
OVERALL WIDTH DISCHARGE	120.00"
C OVERALL HEIGHT	144.50"
D CHAMBER DEPTH	100.00"
E SIDE DOOR CHUTE CLEARANCE	22.50
F DISCHARGE CLEARANCE (STD. FLAT)	37.00"
DISCHARGE CLEARANCE (DOGLEG)	49.75"
PIVOT DISCHARGE @ MIN. CLEARANCE	32.00"
DISCHARGE CLEARANCE (STD+CHUTE)	27.00"
TRACTOR MIN. HORSE POWER	180
NUMBER OF AXLES	2

* ALL HEIGHTS BASED ON 75R22.5 TIRES

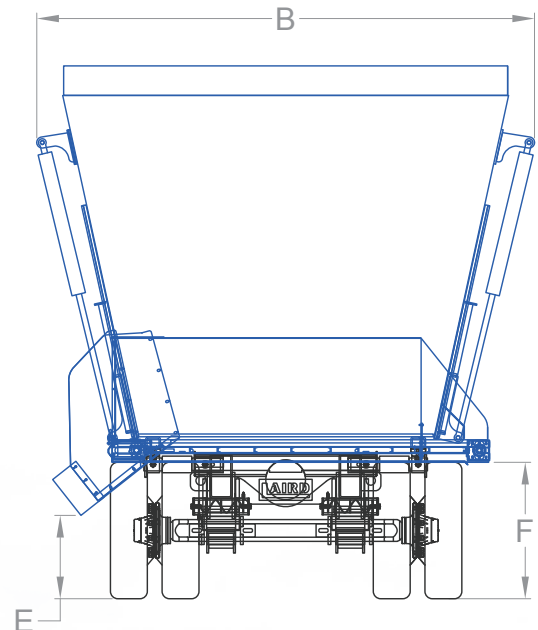

Performance, Longevity | Made in the U.S.A 
& Quality Service

Call Today 209-722-4146

[Return to Website Click Here](#)



VR-1444DD VERTICAL MIXER TRAILER-MOUNT

(TRIPLE AUGER)

VR-1444DD STANDARD EQUIPMENT

1. 1444 Cu.Ft. Mixing Chamber | 92" Side Wall Plus 8" Belt Extension
2. 1" Steel Sub-Floor & 6mm | 0.236 in Stainless Steel Baffles
3. Three Vertical Augers with 5mm Stainless Steel On Bottom Flight, 3mm Stainless Steel Auger Cap, & Stainless Round Bar Around Perimeter
4. Three Heavy Duty Planetary Gear Boxes (SOM-PG 1802) Integrated With 90 Degree Bevel Gears (T-269)
5. Discharge Conveyor (L) Stainless Steel 8.5' - Hydraulic, Adjustable On 8 Bearings (C-2082 Roller Chain)
6. PTO Shaft With 3/8" Shearbolt (1000 RPM)
7. ZDB Auto-Shift Transmission (RG) - With Oil Cooler, Hoses, & Speed Sensor. Includes RPM Controller for Clutch Protection on Transmission
8. AutoShift With Speed Control - Enables Mixing in High Speed - Except On Startup or When The Output RPM Drops Below 450 RPM
9. Wireless Controller For Selecting High & Low Speeds
10. 8 X 275/70R/22.5 Tires On Walking Beam Suspension With Tandem ADR Square Axles
11. 4 X 30,000 Lbs. Capacity Weighbars - 3.5" Diameter
12. 15 High Quality Busatis Blades (5 Per Auger) Plus Two Counter Knives
13. Extra Kickers on Front & Rear Augers, 4 Hydraulic Hoses, Includes Viewing Platform & Mechanical Jack
14. Painted Laird White With Blue Trim


[Return to Website Click Here](#)



VR-1600DD VERTICAL MIXER TRAILER-MOUNT


(TRIPLE AUGER)

VR-1600DD DIAGRAM

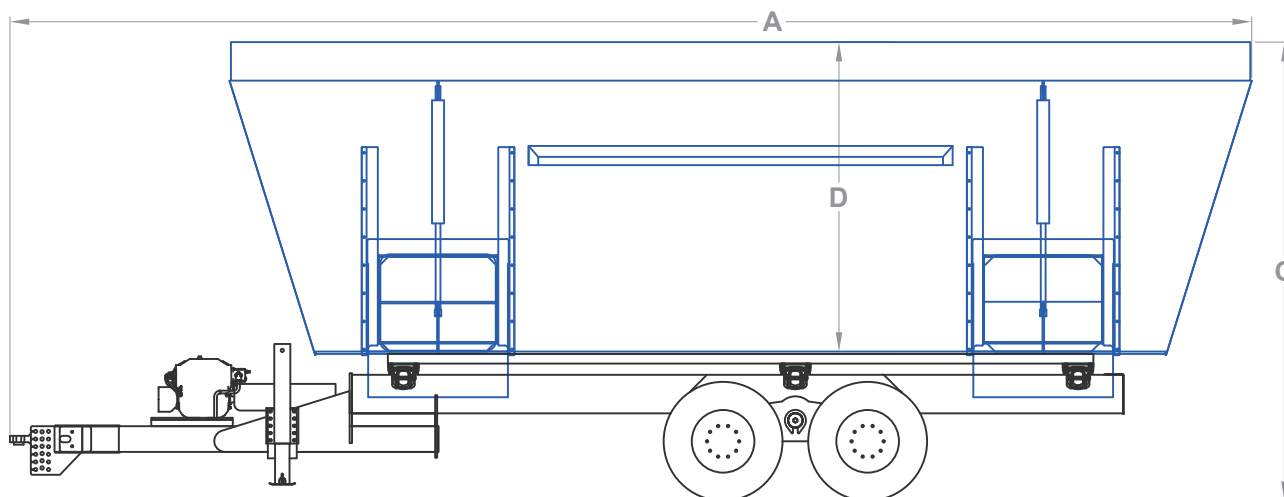

UNIT SPECIFICATIONS	
NUMBER OF AUGERS	3
VOLUME (CU.FT.)	1516
MAX LOAD @ 25LBS/CU.FT.	37900
A OVERALL LENGTH	386.50"
B OVERALL WIDTH SIDE DOORS	133.00"
OVERALL WIDTH DISCHARGE	114.00"
C OVERALL HEIGHT	142.75"
D CHAMBER DEPTH	96.00"
E SIDE DOOR CHUTE CLEARANCE	27.00
F DISCHARGE CLEARANCE (STD. FLAT)	39.00"
DISCHARGE CLEARANCE (DOGLEG)	51.50"
PIVOT DISCHARGE @ MIN. CLEARANCE	33.75"
DISCHARGE CLEARANCE (STD+CHUTE)	29.00"
TRACTOR MIN. HORSE POWER	280
NUMBER OF AXLES	2

* ALL HEIGHTS BASED ON 75R22.5 TIRES

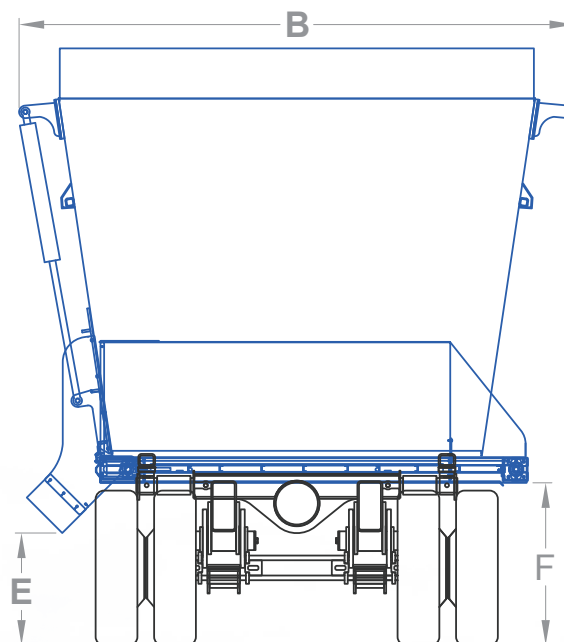

Performance, Longevity | Made in the U.S.A. 
& Quality Service

Call Today 209-722-4146

[Return to Website Click Here](#)



VR-1600DD VERTICAL MIXER TRAILER-MOUNT

(TRIPLE AUGER)

VR-1600DD STANDARD EQUIPMENT

1. 1600 Cu.Ft. Mixing Chamber | 7Ft. Side Wall Plus 12" Steel Extension
2. 1" Steel Sub-Floor & 6mm | 0.236 in Stainless Steel Baffles
3. Three Vertical Augers with 5mm Stainless Steel On Bottom Flight, 3mm Stainless Steel Auger Cap, & Stainless Round Bar Around Perimeter
4. Three Heavy Duty Planetary Gear Boxes (Som PG-3002) Integrated With 90 Degree Bevel Gears (T-310)
5. 2 Side Doors (R,L Sides) With Slide Chutes
6. PTO Shaft With 3/8" Shearbolt (1000 RPM)
7. ZDB Auto-Shift Transmission (QJ) - With Oil Cooler, Hoses, & Speed Sensor. Includes RPM Controller for Clutch Protection on Transmission
8. AutoShift With Speed Control - Enables Mixing in High Speed - Except On Startup or When The Output RPM Drops Below 450 RPM
9. Wireless Controller For Selecting High & Low Speeds Manually
10. 8 X 275/70R/22.5 Tires On Walking Beam Suspension With Tandem ADR Square Axles
11. 6 X 30,000 Lbs. Capacity Weighbars - 3.5" Diameter
12. 15 High Quality Busatis Blades (5 Per Auger) Plus Two Counter Knives
13. Extra Kickers on Front & Rear Augers, 4 Hydraulic Hoses, Includes Viewing Platform & Mechanical Jack
14. Painted Laird White With Blue Trim


Return to Website Click Here



VR-1800DD VERTICAL MIXER TRAILER-MOUNT


(TRIPLE AUGER)

VR-1800DD DIAGRAM

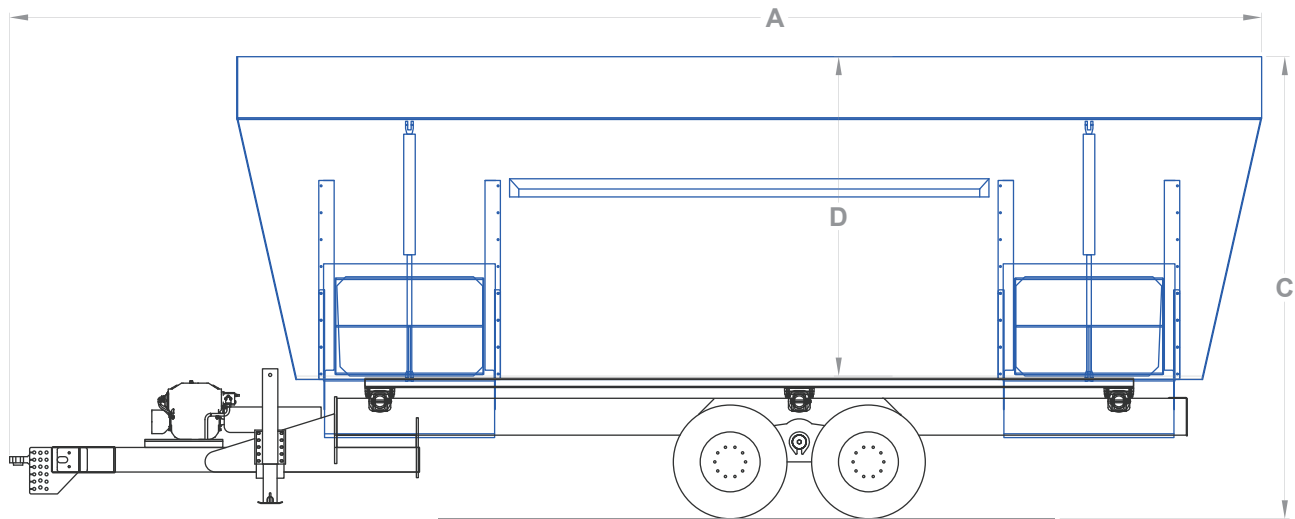

UNIT SPECIFICATIONS	
NUMBER OF AUGERS	3
VOLUME (CU.FT.)	1867
MAX LOAD @ 25LBS/CU.FT.	46675
A OVERALL LENGTH	407.50"
B OVERALL WIDTH SIDE DOORS	137.25"
OVERALL WIDTH DISCHARGE	118.00"
C OVERALL HEIGHT	142.75"
D CHAMBER DEPTH	104.00"
E SIDE DOOR CHUTE CLEARANCE	24.00
F DISCHARGE CLEARANCE (STD. FLAT)	39.00"
DISCHARGE CLEARANCE (DOGLEG)	51.50"
PIVOT DISCHARGE @ MIN. CLEARANCE	33.75"
DISCHARGE CLEARANCE (STD+CHUTE)	29.00"
TRACTOR MIN. HORSE POWER	280
NUMBER OF AXLES	2

* ALL HEIGHTS BASED ON 75R22.5 TIRES

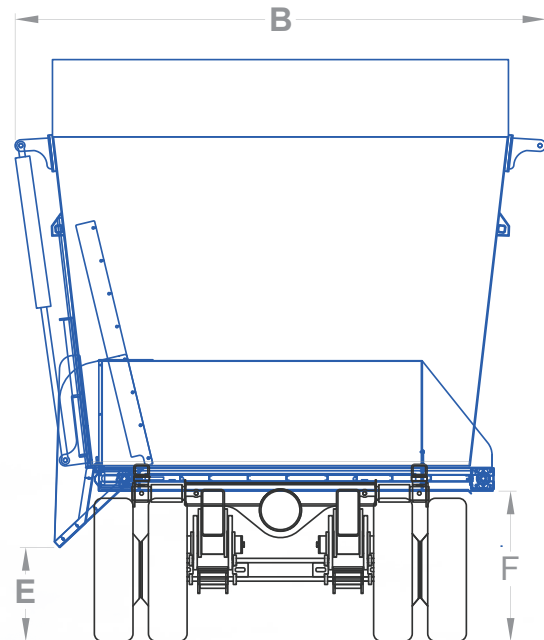

Performance, Longevity | Made in the U.S.A. 
& Quality Service

Call Today 209-722-4146

[Return to Website Click Here](#)



VR-1800DD VERTICAL MIXER TRAILER-MOUNT

(TRIPLE AUGER)

VR-1800DD STANDARD EQUIPMENT

1. 1800 Cu.Ft. Mixing Chamber | 7Ft. Side Wall Plus 20" Steel Extension
2. 1" Steel Sub-Floor & 6mm | 0.236 in Stainless Steel Baffles
3. Three Vertical Augers with 5mm Stainless Steel On Bottom Flight, 3mm Stainless Steel Auger Cap, & Stainless Round Bar Around Perimeter
4. Three Heavy Duty Planetary Gear Boxes (R&R-3200) Integrated With 90 Degree Bevel Gears (T-310)
5. 4 Side Doors (R,L, Front & Rear) With Slide Chutes
6. Constant Velocity (CV PTO) Shaft With Shearbolt (1000 RPM)
7. ZDB Auto-Shift Transmission (QJ) - With Oil Cooler, Hoses, & Speed Sensor. Includes RPM Controller for Clutch Protection on Transmission
8. AutoShift W/ Speed Control - Allows Mixing in High Speed
- Except On Startup & When The Output RPM Drops Below 450 RPM
9. Wireless Controller For Selecting High & Low Speeds
10. 8 - 315/80R/22.5 Tires on HD Walking Beam Suspension With Tandem ADR Square Axles
11. 6 X 30,000 Lbs. Capacity Weighbars - 3.5" Diameter
12. 15 High Quality Busatis Blades (5 Per Auger) Plus Two Counter Knives
13. Extra Kickers on Front & Rear Augers, 4 Hydraulic Hoses, Includes Viewing Platform & Mechanical Jack
14. Painted Laird White With Blue Trim

[Return to Website Click Here](#)





Cattle Feeding Equipment & Solutions



531 S. Hwy. 59 | Merced, CA 95341
P: (209) 722-4145 | F: (209) 349-8934 | sales@lairdmfg.com | www.lairdmfg.com

[Return to Website Click Here](http://www.lairdmfg.com)