



VERTICAL TRUCK MOUNTED SERIES

HYDROSTATIC SYSTEM



Cattle Feeding Equipment & Solutions


[Return to Website Click Here](#)



VT-600 VERTICAL TRUCK - HYDROSTATIC SYSTEM


(SINGLE AUGER)

VT-600 DIAGRAM

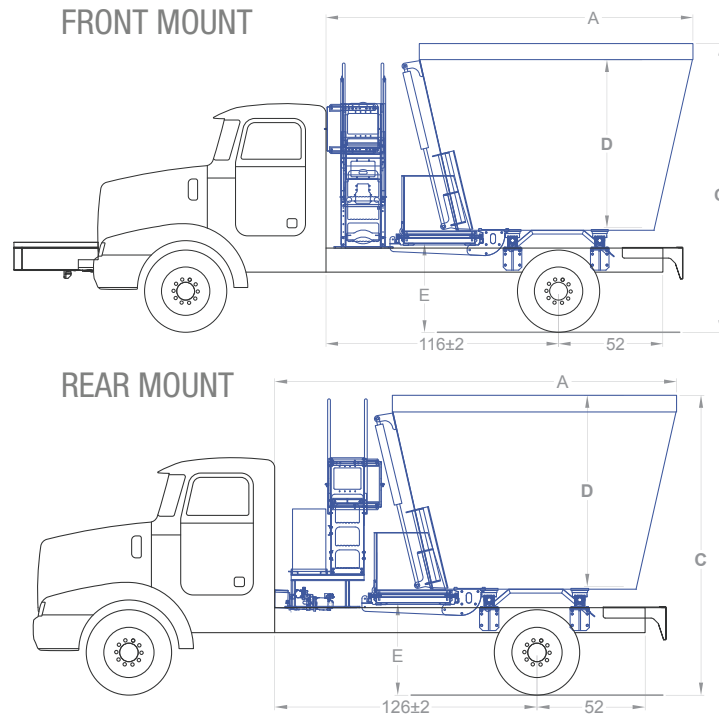

UNIT SPECIFICATIONS	
NUMBER OF AUGERS	1
VOLUME (CU.FT.)	542
MAX LOAD @ 25LBS/CU.FT.	13550
A OVERALL LENGTH FRONT MOUNT	183.00"
OVERALL LENGTH REAR MOUNT	193.00"
B OVERALL WIDTH DISCHARGE	118.00"
C OVERALL HEIGHT	144.00"
D CHAMBER DEPTH	92.00"
E DISCHARGE CLEARANCE (STD. FLAT)	44.25"
DISCHARGE CLEARANCE (DOGLEG)	46.75"
PIVOT DISCHARGE @ MIN. CLEARANCE	39.00"
DISCHARGE CLEARANCE (STD+CHUTE)	34.25"
TRACTOR MIN. HORSE POWER	200
NUMBER OF AXLES	1
BASED ON FRAME HEIGHT	42

* ALL HEIGHTS BASED ON 75R22.5 TIRES

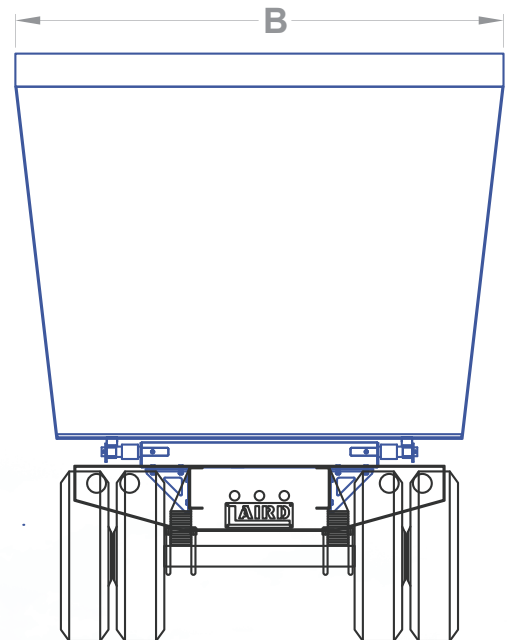

Performance, Longevity | Made in the U.S.A. 
& Quality Service

Call Today 209-722-4146

[Return to Website Click Here](#)



VT-600 VERTICAL TRUCK - HYDROSTATIC SYSTEM

(SINGLE AUGER)

VT-600

STANDARD EQUIPMENT

1. 600 Cu.Ft. Mixing Chamber | 7 Ft. Side Wall
2. 1" Steel Sub-Floor
3. One Vertical Auger with 5mm Stainless Steel On Bottom Flight, 3mm Stainless Steel Auger Cap, & Stainless Round Bar Around Perimeter
4. One Heavy Duty Planetary Gear Box (RR-3200) With Bent Axis Hydraulic Motor
5. Standard Discharge Conveyor (L) Hydraulically Adjustable - Stainless Steel 8.5' (C-2082 Roller Chain)
6. Complete Hydrostatic System to Drive the Augers, Discharge Conveyor, & Open the Discharge Door
7. Reversible Hydraulic Fan With Automatic Self Cleaning Cycle (Includes Thermal Valve For Cold Climates)
8. Plus One Controller With Joystick Controls
9. 4 X 10,000 Lbs. Capacity Weighbars - 2 1/8" Diameter
10. 5 High Quality Busatis Blades (5 Per Auger) Plus Two Counter Knives
11. Painted Laird White With Blue Trim

Return to Website Click Here




VT-700 XL VERTICAL TRUCK - HYDROSTATIC SYSTEM


(SINGLE AUGER)

VT-700 XL DIAGRAM

FRONT MOUNT

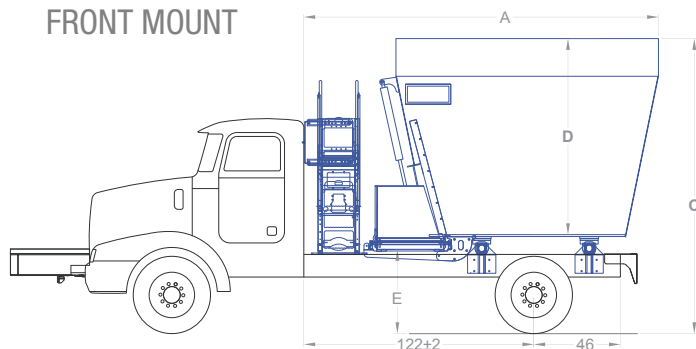


REAR MOUNT

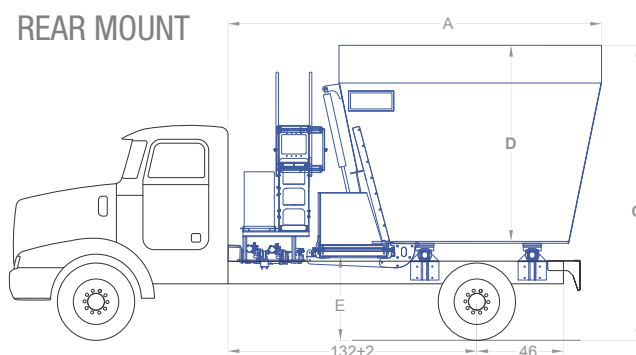

UNIT SPECIFICATIONS	
NUMBER OF AUGERS	1
VOLUME (CU.FT.)	696
MAX LOAD @ 25LBS/CU.FT.	17400
A OVERALL LENGTH FRONT MOUNT	188.00"
OVERALL LENGTH REAR MOUNT	198.00"
B OVERALL WIDTH DISCHARGE	128.00"
C OVERALL HEIGHT	156.00"
D CHAMBER DEPTH	104.00"
E DISCHARGE CLEARANCE (STD. FLAT)	44.25"
DISCHARGE CLEARANCE (DOGLEG)	46.75"
PIVOT DISCHARGE @ MIN. CLEARANCE	39.00"
DISCHARGE CLEARANCE (STD+CHUTE)	34.25"
TRUCK MIN. HORSE POWER	300
NUMBER OF AXLES	1
BASED ON FRAME HEIGHT	42

* ALL HEIGHTS BASED ON 75R22.5 TIRES

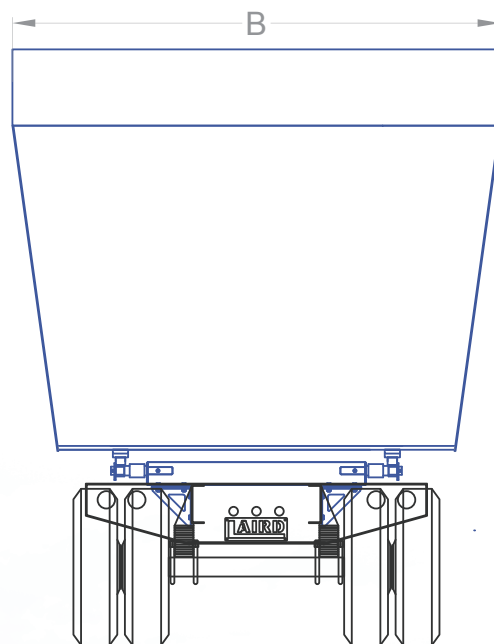

Performance, Longevity | Made in 
& Quality Service | the U.S.A

Call Today 209-722-4146

[Return to Website Click Here](#)



VT-700 XL VERTICAL TRUCK - HYDROSTATIC SYSTEM

(SINGLE AUGER)

VT-700 XL

STANDARD EQUIPMENT

1. 700 Cu.Ft. Mixing Chamber | 7 Ft. Side Wall Plus 12" Steel Extension Plus 8" Belting Extension
2. 1" Steel Sub-Floor
3. One Vertical Auger with 5mm Stainless Steel On Bottom Flight, 3mm Stainless Steel Auger Cap, & Stainless Round Bar Around Perimeter
4. One Heavy Duty Planetary Gear Box (RR-3200) With Bent Axis Hydraulic Motor
5. Standard Discharge Conveyor (L) Hydraulically Adjustable - Stainless Steel 8.5' (C-2082 Roller Chain)
6. (Bent-Axis Version) Complete Hydrostatic System to Drive the Augers , Discharge Conveyor, & Open the Discharge Door
7. Reversible Hydraulic Fan With Automatic Self Cleaning Cycle (Includes Thermal Valve for Cold Climates)
8. Plus One Controller With Joystick Controls - Automatic High Speed Option
9. 4 X 15,000 Lbs. Capacity Weighbars - 2 1/2" Diameter
10. 5 High Quality Busatis Blades (5 Per Auger) Plus Two Counter Knives
11. Painted Laird White With Blue Trim

[Return to Website Click Here](#)




VT-675 VERTICAL TRUCK - HYDROSTATIC SYSTEM


(TWIN AUGER)

VT-675 DIAGRAM

FRONT MOUNT

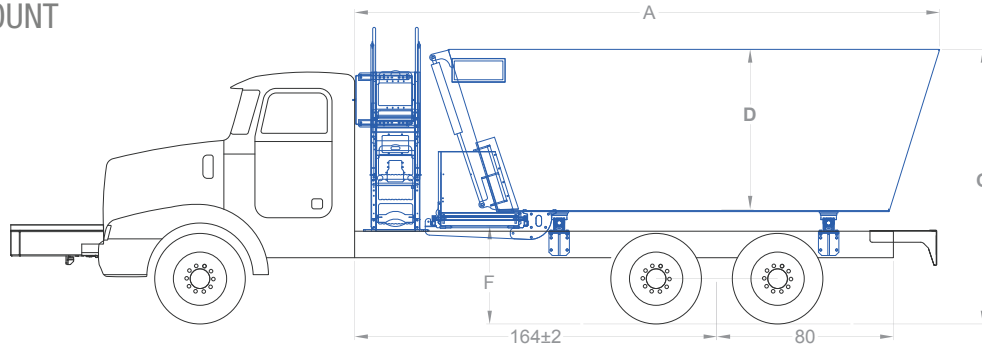


REAR MOUNT

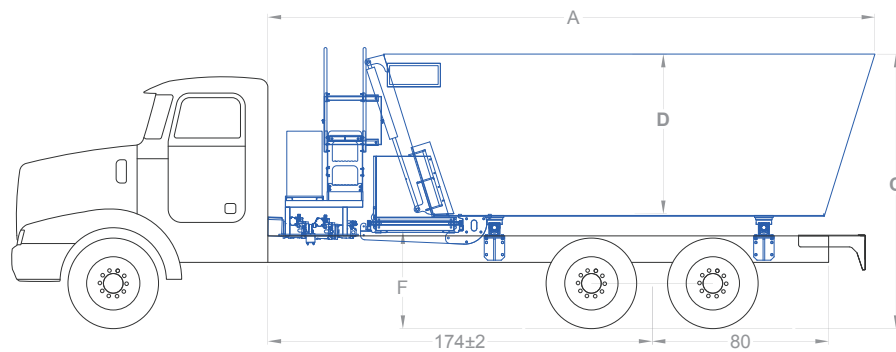

UNIT SPECIFICATIONS

NUMBER OF AUGERS	2
VOLUME (CU.FT.)	713
MAX LOAD @ 25LBS/CU.FT.	17825
A OVERALL LENGTH FRONT MOUNT	265.00"
OVERALL LENGTH REAR MOUNT	275.00"
B OVERALL WIDTH SIDE DOORS	129.50"
OVERALL WIDTH DISCHARGE	110.50"
C OVERALL HEIGHT	124.25"
D CHAMBER DEPTH	72.00"
E SIDE DOOR CHUTE CLEARANCE	32.25"
F DISCHARGE CLEARANCE (STD. FLAT)	44.25"
DISCHARGE CLEARANCE (DOGLEG)	46.75"
PIVOT DISCHARGE @ MIN. CLEARANCE	39.00"
DISCHARGE CLEARANCE (STD+CHUTE)	34.25"
TRACTOR MIN. HORSE POWER	275
NUMBER OF AXLES	2
BASED ON FRAME HEIGHT	42

* ALL HEIGHTS BASED ON 75R22.5 TIRES

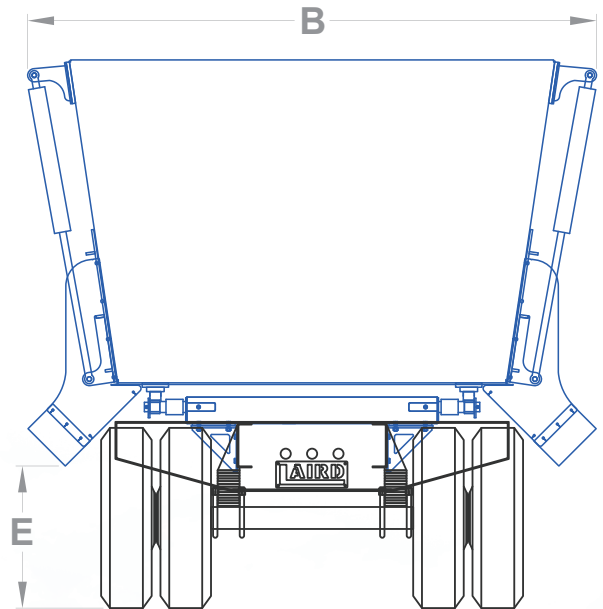

Performance, Longevity | Made in the U.S.A. 
& Quality Service

Call Today 209-722-4146

[Return to Website Click Here](#)



VT-675 VERTICAL TRUCK - HYDROSTATIC SYSTEM

(TWIN AUGER)

VT-675

STANDARD EQUIPMENT

1. 675 Cu.Ft. Mixing Chamber | 6 Ft. Side Wall
2. 3/4" Steel Sub-Floor & 6mm | 0.236 in Stainless Steel Baffles
3. One Vertical Auger with 5mm Stainless Steel On Bottom Flight, 3mm Stainless Steel Auger Cap, & Stainless Round Bar Around Perimeter
4. Two Heavy Duty Planetary Gear Boxes Integrated With Bent Axis Hydraulic Motors
5. Standard Discharge Conveyor (L) Hydraulically Adjustable - Stainless Steel 8.5' (C-2082 Roller Chain)
6. Complete Hydrostatic System to Drive the Augers, Discharge Conveyor, & Open the Discharge Door
7. Reversible Hydraulic Fan With Automatic Self Cleaning Cycle (Includes Thermal Valve for Cold Climates)
8. Plus One Controller With Joystick Controls
9. 4 X 10,000 Lbs. Capacity Weighbars - 2 1/8" Diameter
10. 10 High Quality Busatis Blades (5 Per Auger) Plus Two Counter Knives
11. Painted Laird White With Blue Trim

[Return to Website Click Here](#)




VT-750 VERTICAL TRUCK - HYDROSTATIC SYSTEM


(TWIN AUGER)

VT-750 DIAGRAM

FRONT MOUNT

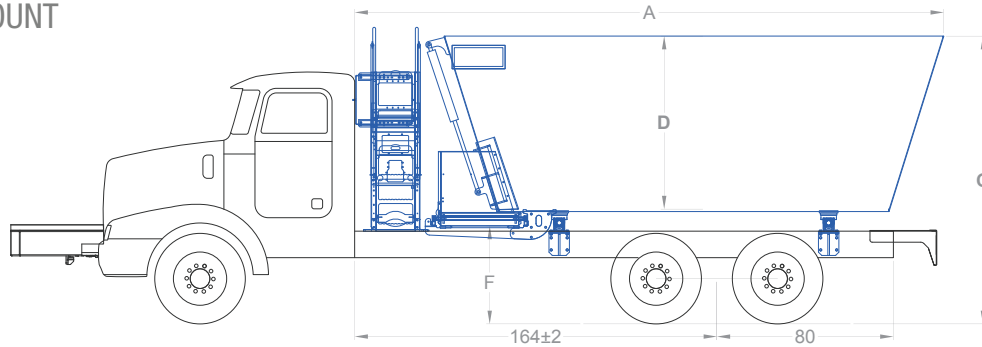


REAR MOUNT

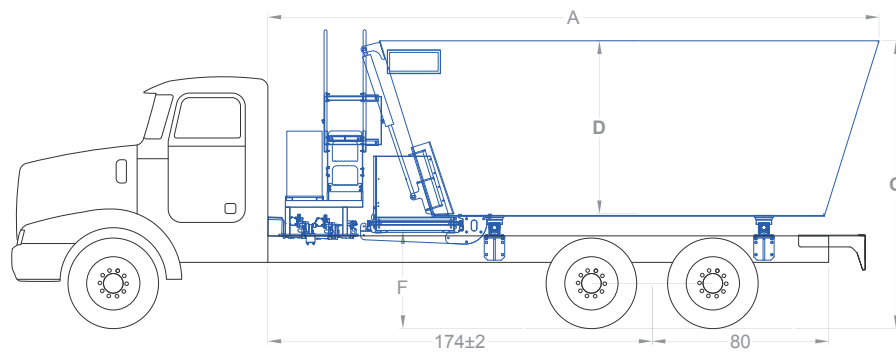

UNIT SPECIFICATIONS

NUMBER OF AUGERS	2
VOLUME (CU.FT.)	790
MAX LOAD @ 25LBS/CU.FT.	19750
A OVERALL LENGTH FRONT MOUNT	266.75"
OVERALL LENGTH REAR MOUNT	276.75"
B OVERALL WIDTH SIDE DOORS	131.25"
OVERALL WIDTH DISCHARGE	112.25"
C OVERALL HEIGHT	130.25"
D CHAMBER DEPTH	78.00"
E SIDE DOOR CHUTE CLEARANCE	32.25"
F DISCHARGE CLEARANCE (STD. FLAT)	44.25"
DISCHARGE CLEARANCE (DOGLEG)	46.75"
PIVOT DISCHARGE @ MIN. CLEARANCE	39.00"
DISCHARGE CLEARANCE (STD+CHUTE)	34.25"
TRACTOR MIN. HORSE POWER	325
NUMBER OF AXLES	2
BASED ON FRAME HEIGHT	42

* ALL HEIGHTS BASED ON 75R22.5 TIRES

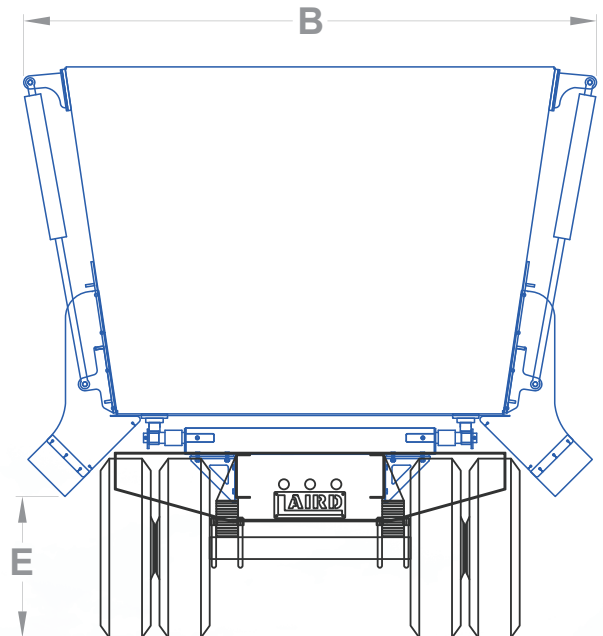

Performance, Longevity | Made in the U.S.A. 
& Quality Service

Call Today 209-722-4146

[Return to Website Click Here](#)



VT-750 VERTICAL TRUCK - HYDROSTATIC SYSTEM

(TWIN AUGER)

VT-750

STANDARD EQUIPMENT

1. 750 Cu.Ft. Mixing Chamber | 6 1/2 Ft. Side Wall
2. 3/4" Steel Sub-Floor & 6mm | 0.236 in Stainless Steel Baffles
3. One Vertical Auger with 5mm Stainless Steel On Bottom Flight, 3mm Stainless Steel Auger Cap, & Stainless Round Bar Around Perimeter
4. Two Heavy Duty Planetary Gear Boxes Integrated With Bent Axis Hydraulic Motors
5. Standard Discharge Conveyor (L) Hydraulically Adjustable - Stainless Steel 8.5' (C-2082 Roller Chain)
6. Complete Hydrostatic System to Drive the Augers, Discharge Conveyor, & Open the Discharge Door
7. Reversible Hydraulic Fan With Automatic Self Cleaning Cycle (Includes Thermal Valve for Cold Climates)
8. Plus One Controller With Joystick Controls
9. 4 X 10,000 Lbs. Capacity Weighbars - 2 1/8" Diameter
10. 10 High Quality Busatis Blades (5 Per Auger) Plus Two Counter Knives
11. Painted Laird White With Blue Trim

[Return to Website Click Here](#)




VT-800 VERTICAL TRUCK - HYDROSTATIC SYSTEM


(TWIN AUGER)

VT-800 DIAGRAM

FRONT MOUNT

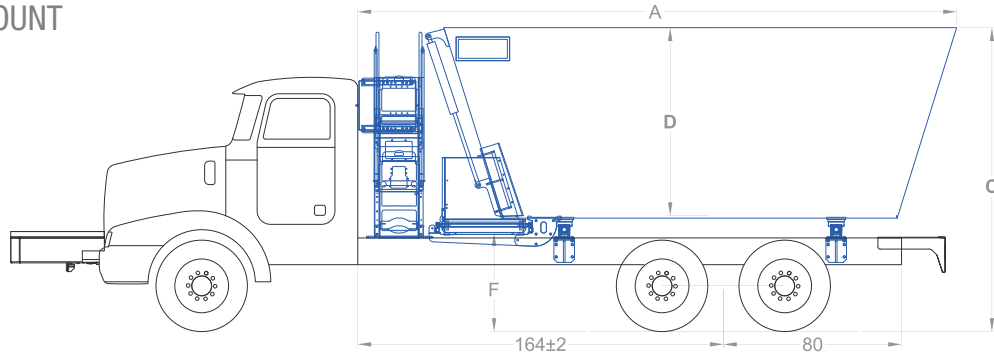


REAR MOUNT

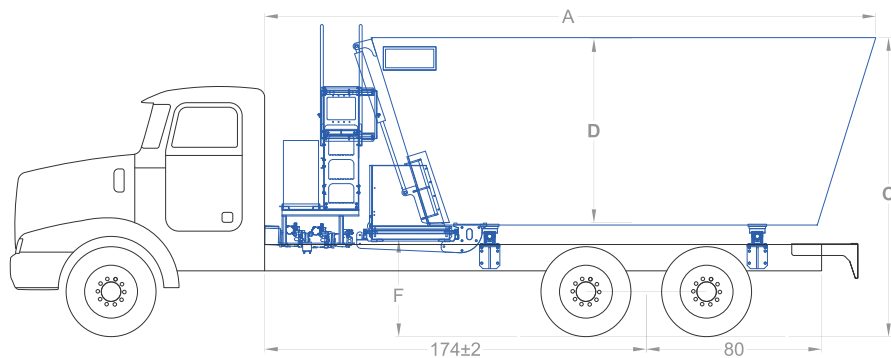

UNIT SPECIFICATIONS

NUMBER OF AUGERS	2
VOLUME (CU.FT.)	869
MAX LOAD @ 25LBS/CU.FT.	21725
A OVERALL LENGTH FRONT MOUNT	268.50"
OVERALL LENGTH REAR MOUNT	278.50"
B OVERALL WIDTH SIDE DOORS	133.00"
OVERALL WIDTH DISCHARGE	114.00"
C OVERALL HEIGHT	136.25"
D CHAMBER DEPTH	84.00"
E SIDE DOOR CHUTE CLEARANCE	32.25"
F DISCHARGE CLEARANCE (STD. FLAT)	44.25"
DISCHARGE CLEARANCE (DOGLEG)	46.75"
PIVOT DISCHARGE @ MIN. CLEARANCE	39.00"
DISCHARGE CLEARANCE (STD+CHUTE)	34.25"
TRACTOR MIN. HORSE POWER	350
NUMBER OF AXLES	2
BASED ON FRAME HEIGHT	42

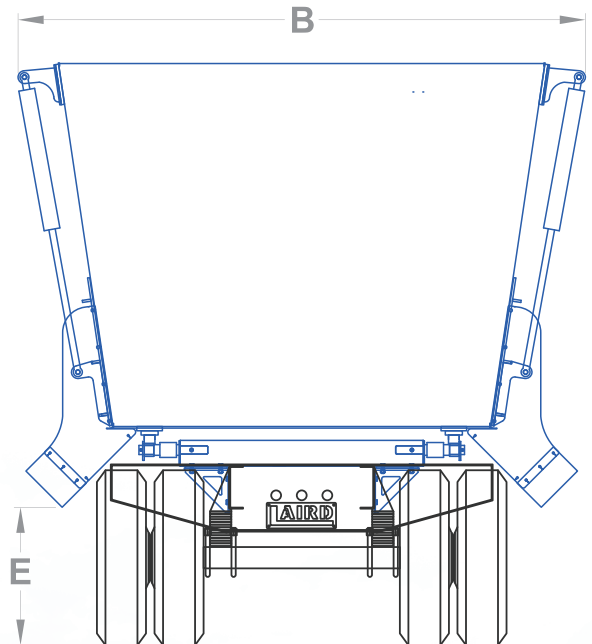

Performance, Longevity | Made in the U.S.A. 
& Quality Service

Call Today 209-722-4146

* ALL HEIGHTS BASED ON 75R22.5 TIRES

[Return to Website Click Here](#)



VT-800 VERTICAL TRUCK - HYDROSTATIC SYSTEM

(TWIN AUGER)

VT-800

STANDARD EQUIPMENT

1. 800 Cu.Ft. Mixing Chamber | 7 Ft. Side Wall
2. 3/4" Steel Sub-Floor & 6mm | 0.236 in Stainless Steel Baffles
3. One Vertical Auger with 5mm Stainless Steel On Bottom Flight, 3mm Stainless Steel Auger Cap, & Stainless Round Bar Around Perimeter
4. Two Heavy Duty Planetary Gear Boxes Integrated With Bent Axis Hydraulic Motors
5. Standard Discharge Conveyor (L) Hydraulically Adjustable - Stainless Steel 8.5' (C-2082 Roller Chain)
6. Complete Hydrostatic System to Drive the Augers, Discharge Conveyor, & Open the Discharge Door
7. Reversible Hydraulic Fan With Automatic Self Cleaning Cycle (Includes Thermal Valve for Cold Climates)
8. Plus One Controller With Joystick Controls
9. 4 X 10,000 Lbs. Capacity Weighbars - 2 1/8" Diameter
10. 10 High Quality Busatis Blades (5 Per Auger) Plus Two Counter Knives
11. Painted Laird White With Blue Trim

[Return to Website Click Here](#)




VT-1000 VERTICAL TRUCK - HYDROSTATIC SYSTEM


(TWIN AUGER)

VT-1000 DIAGRAM

FRONT MOUNT

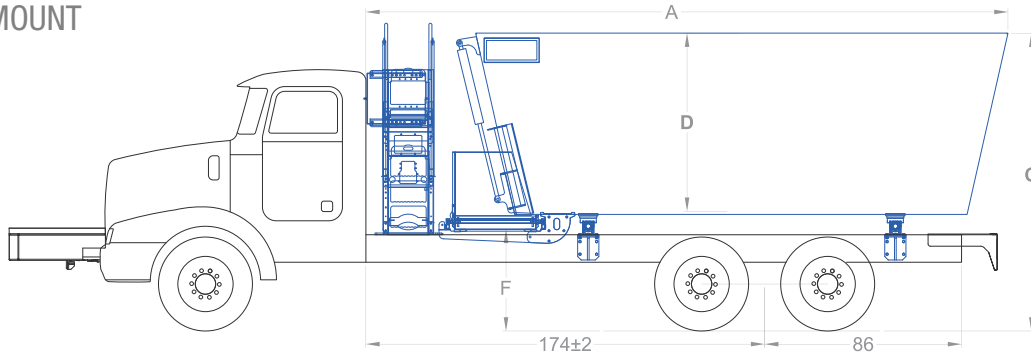


REAR MOUNT

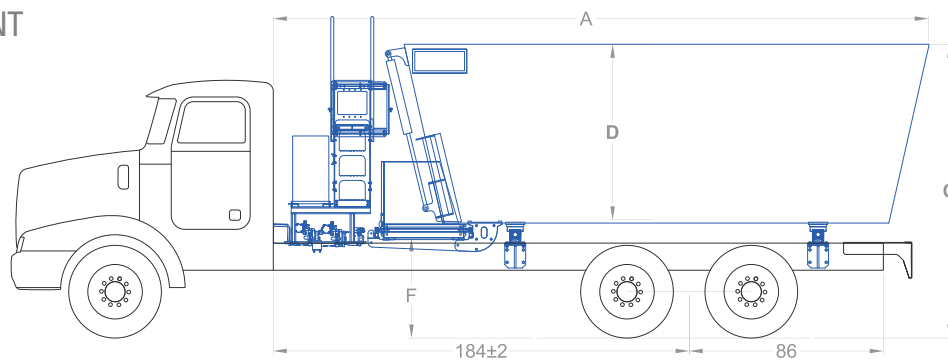

UNIT SPECIFICATIONS

NUMBER OF AUGERS	2
VOLUME (CU.FT.)	880
MAX LOAD @ 25LBS/CU.FT.	22000
A OVERALL LENGTH FRONT MOUNT	280.00"
OVERALL LENGTH REAR MOUNT	289.75"
B OVERALL WIDTH SIDE DOORS	136.00"
OVERALL WIDTH DISCHARGE	116.50"
C OVERALL HEIGHT	130.00"
D CHAMBER DEPTH	78.00"
E SIDE DOOR CHUTE CLEARANCE	27.75"
F DISCHARGE CLEARANCE (STD. FLAT)	44.25"
DISCHARGE CLEARANCE (DOGLEG)	46.75"
PIVOT DISCHARGE @ MIN. CLEARANCE	39.00"
DISCHARGE CLEARANCE (STD+CHUTE)	34.25"
TRACTOR MIN. HORSE POWER	350
NUMBER OF AXLES	2
BASED ON FRAME HEIGHT	42

* ALL HEIGHTS BASED ON 75R22.5 TIRES

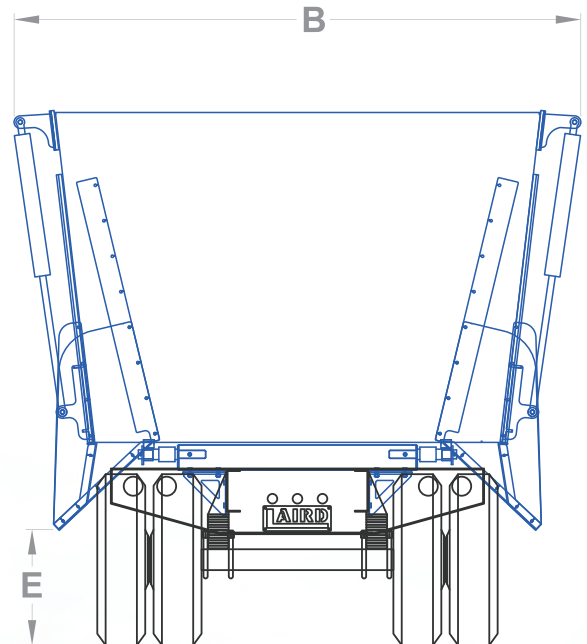

Performance, Longevity | Made in the U.S.A. 
& Quality Service

Call Today 209-722-4146

[Return to Website Click Here](#)



VT-1000 VERTICAL TRUCK - HYDROSTATIC SYSTEM

(TWIN AUGER)

VT-1000

STANDARD EQUIPMENT

1. 1000 Cu.Ft. Mixing Chamber | 6 1/2 Ft. Side Wall
2. 1" Steel Sub-Floor & 6mm | 0.236 in Stainless Steel Baffles
3. One Vertical Auger with 5mm Stainless Steel On Bottom Flight, 3mm Stainless Steel Auger Cap, & Stainless Round Bar Around Perimeter
4. Two Heavy Duty Planetary Gear Boxes Integrated With Bent Axis Hydraulic Motors
5. Standard Discharge Conveyor (L) Hydraulically Adjustable - Stainless Steel 8.5' (C-2082 Roller Chain)
6. Complete Hydrostatic System to Drive the Augers, Discharge Conveyor, & Open the Discharge Door
7. Reversible Hydraulic Fan With Automatic Self Cleaning Cycle (Includes Thermal Valve for Cold Climates)
8. Plus One Controller With Joystick Controls
9. 4 X 10,000 Lbs. Capacity Weighbars - 2 1/8" Diameter
10. 10 High Quality Busatis Blades (5 Per Auger) Plus Two Counter Knives
11. Painted Laird White With Blue Trim

[Return to Website Click Here](#)




VT-1200 VERTICAL TRUCK - HYDROSTATIC SYSTEM


(TWIN AUGER)

VT-1200 DIAGRAM

FRONT MOUNT

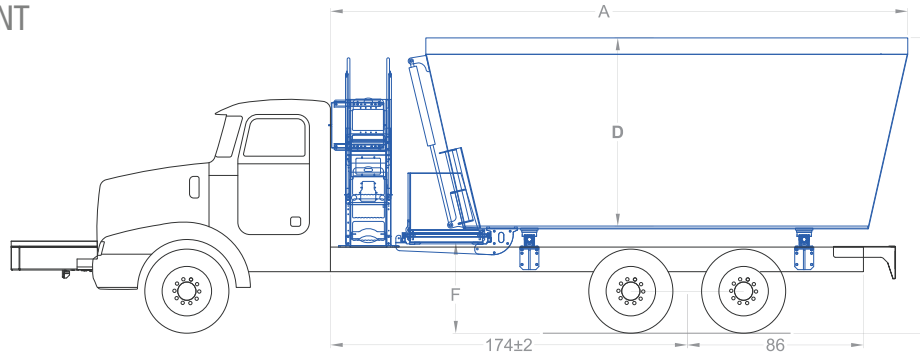


REAR MOUNT

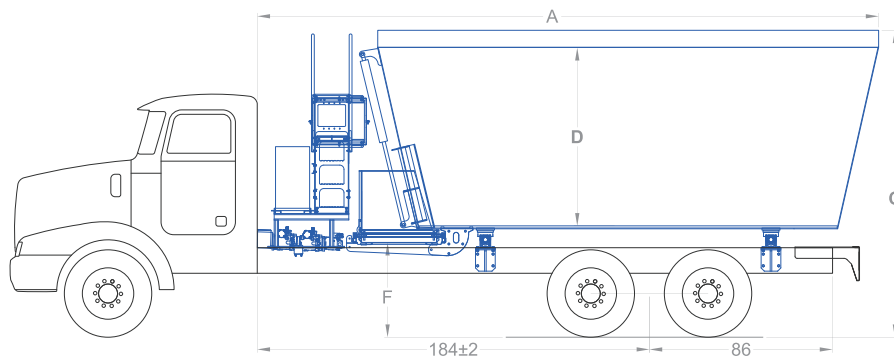

UNIT SPECIFICATIONS

NUMBER OF AUGERS	2
VOLUME (CU.FT.)	1079
MAX LOAD @ 25LBS/CU.FT.	27100
A OVERALL LENGTH FRONT MOUNT	281.50"
OVERALL LENGTH REAR MOUNT	291.50"
B OVERALL WIDTH SIDE DOORS	137.25"
OVERALL WIDTH DISCHARGE	118.00"
C OVERALL HEIGHT	144.00"
D CHAMBER DEPTH	92.00"
E SIDE DOOR CHUTE CLEARANCE	27.75"
F DISCHARGE CLEARANCE (STD. FLAT)	44.25"
DISCHARGE CLEARANCE (DOGLEG)	46.75"
PIVOT DISCHARGE @ MIN. CLEARANCE	39.00"
DISCHARGE CLEARANCE (STD+CHUTE)	34.25"
TRACTOR MIN. HORSE POWER	350
NUMBER OF AXLES	2
BASED ON FRAME HEIGHT	42

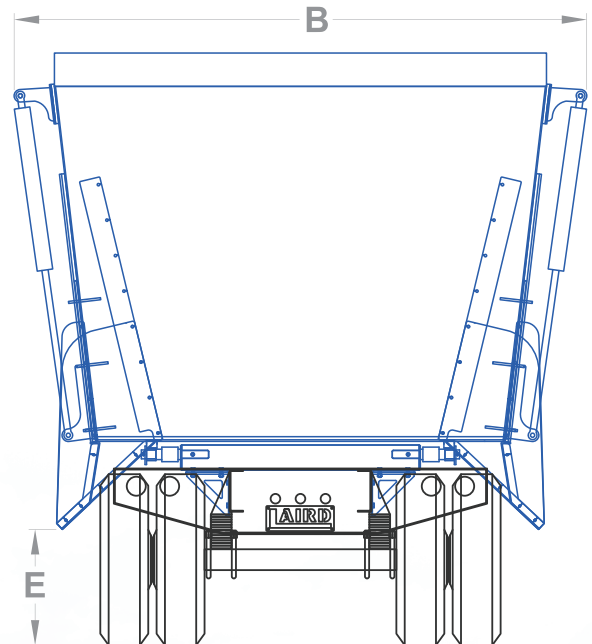

Performance, Longevity | Made in the U.S.A. 
& Quality Service

Call Today 209-722-4146

* ALL HEIGHTS BASED ON 75R22.5 TIRES

[Return to Website Click Here](#)



VT-1200 VERTICAL TRUCK - HYDROSTATIC SYSTEM

(TWIN AUGER)

VT-1200

STANDARD EQUIPMENT

1. 1200 Cu.Ft. Mixing Chamber | 7 Ft. Side Wall Plus 8" Belt Extension
2. 1" Steel Sub-Floor & 6mm | 0.236 in Stainless Steel Baffles
3. One Vertical Auger with 5mm Stainless Steel On Bottom Flight, 3mm Stainless Steel Auger Cap, & Stainless Round Bar Around Perimeter
4. Two Heavy Duty Planetary Gear Boxes Integrated With Bent Axis Hydraulic Motors
5. Standard Discharge Conveyor (L) Hydraulically Adjustable - Stainless Steel 8.5' (C-2082 Roller Chain)
6. Complete Hydrostatic System to Drive the Augers, Discharge Conveyor, & Open the Discharge Door
7. Reversible Hydraulic Fan With Automatic Self Cleaning Cycle (Includes Thermal Valve for Cold Climates)
8. Plus One Controller With Joystick Controls
9. 4 X 15,000 Lbs. Capacity Weighbars - 2.5" Diameter
10. 10 High Quality Busatis Blades (5 Per Auger) Plus Two Counter Knives
11. Painted Laird White With Blue Trim

[Return to Website Click Here](#)




VT-1400 VERTICAL TRUCK - HYDROSTATIC SYSTEM


(TWIN AUGER)

VT-1400 DIAGRAM

FRONT MOUNT

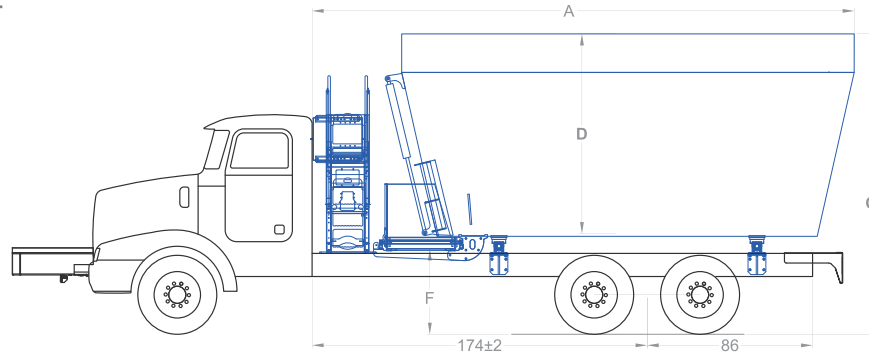


REAR MOUNT

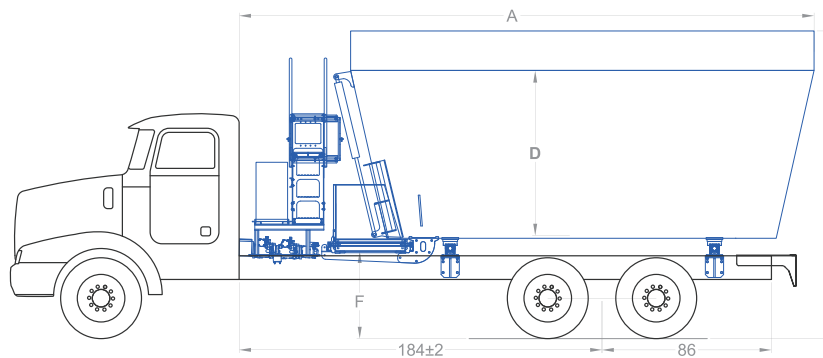

UNIT SPECIFICATIONS

NUMBER OF AUGERS	2
VOLUME (CU.FT.)	1249
MAX LOAD @ 25LBS/CU.FT.	31225
A OVERALL LENGTH FRONT MOUNT	281.50"
OVERALL LENGTH REAR MOUNT	291.50"
B OVERALL WIDTH SIDE DOORS	137.25"
OVERALL WIDTH DISCHARGE	118.00"
C OVERALL HEIGHT	156.00"
D CHAMBER DEPTH	104.00"
E SIDE DOOR CHUTE CLEARANCE	27.75"
F DISCHARGE CLEARANCE (STD. FLAT)	44.25"
DISCHARGE CLEARANCE (DOGLEG)	46.75"
PIVOT DISCHARGE @ MIN. CLEARANCE	39.00"
DISCHARGE CLEARANCE (STD+CHUTE)	34.25"
TRACTOR MIN. HORSE POWER	350
NUMBER OF AXLES	2
BASED ON FRAME HEIGHT	42

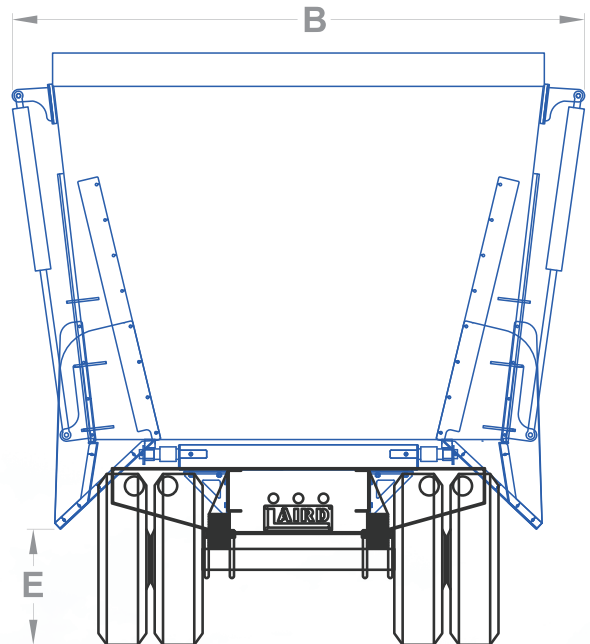

Performance, Longevity | Made in the U.S.A. 
& Quality Service

Call Today 209-722-4146

* ALL HEIGHTS BASED ON 75R22.5 TIRES

[Return to Website Click Here](#)



VT-1400 VERTICAL TRUCK - HYDROSTATIC SYSTEM

(TWIN AUGER)

VT-1400

STANDARD EQUIPMENT

1. 1400 Cu.Ft. Mixing Chamber | 7Ft. Side Wall Plus 20" Steel Extension
2. 1" Steel Sub-Floor & 6mm | 0.236 in Stainless Steel Baffles
3. One Vertical Auger with 5mm Stainless Steel On Bottom Flight, 3mm Stainless Steel Auger Cap, & Stainless Round Bar Around Perimeter
4. Two Heavy Duty Planetary Gear Boxes Integrated With Bent Axis Hydraulic Motors
5. Standard Discharge Conveyor (L) Hydraulically Adjustable - Stainless Steel 8.5' (C-2082 Roller Chain)
6. Complete Hydrostatic System to Drive the Augers, Discharge Conveyor, & Open the Discharge Door
7. Reversible Hydraulic Fan With Automatic Self Cleaning Cycle (Includes Thermal Valve for Cold Climates)
8. Plus One Controller With Joystick Controls
9. 4 X 15,000 Lbs. Capacity Weighbars - 2.5" Diameter
10. 10 High Quality Busatis Blades (5 Per Auger) Plus Two Counter Knives
11. Painted Laird White With Blue Trim


[Return to Website Click Here](#)




VT-1500 XL VERTICAL TRUCK - HYDROSTATIC SYSTEM

(TWIN AUGER)

VT-1500 XL DIAGRAM

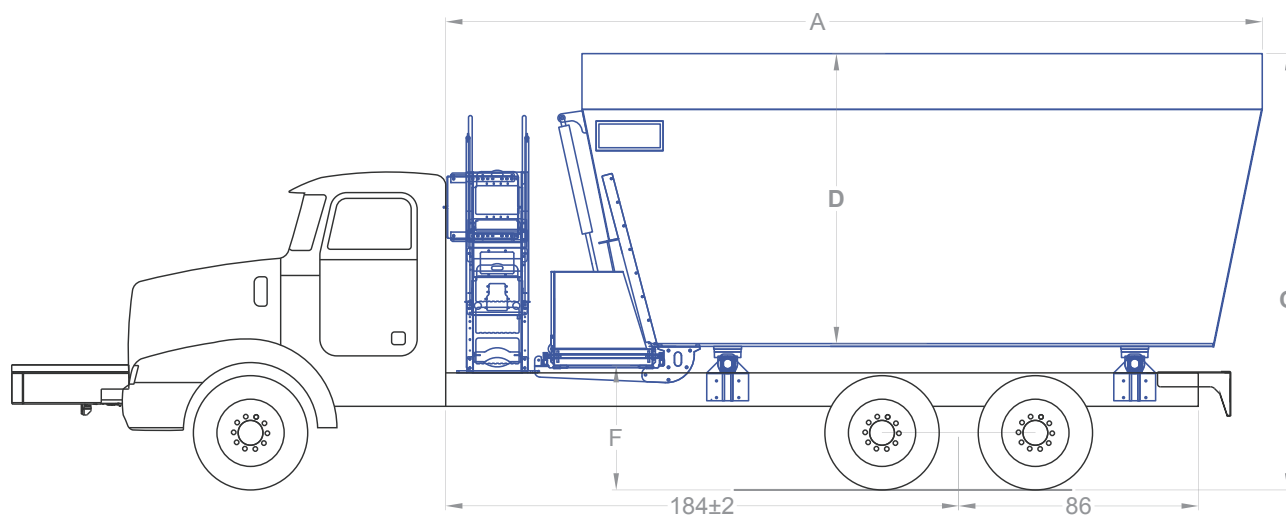

UNIT SPECIFICATIONS	
NUMBER OF AUGERS	2
VOLUME (CU.FT.)	1406
MAX LOAD @ 25LBS/CU.FT.	35150
A OVERALL LENGTH FRONT MOUNT	293.00"
B OVERALL WIDTH SIDE DOORS	147.00"
OVERALL WIDTH DISCHARGE	128.00"
C OVERALL HEIGHT	156.00"
D CHAMBER DEPTH	104.00"
E SIDE DOOR CHUTE CLEARANCE	30.00"
F DISCHARGE CLEARANCE (STD. FLAT)	44.25"
DISCHARGE CLEARANCE (DOGLEG)	46.75"
PIVOT DISCHARGE @ MIN. CLEARANCE	39.00"
DISCHARGE CLEARANCE (STD+CHUTE)	34.25"
TRACTOR MIN. HORSE POWER	500
NUMBER OF AXLES	2
BASED ON FRAME HEIGHT	42

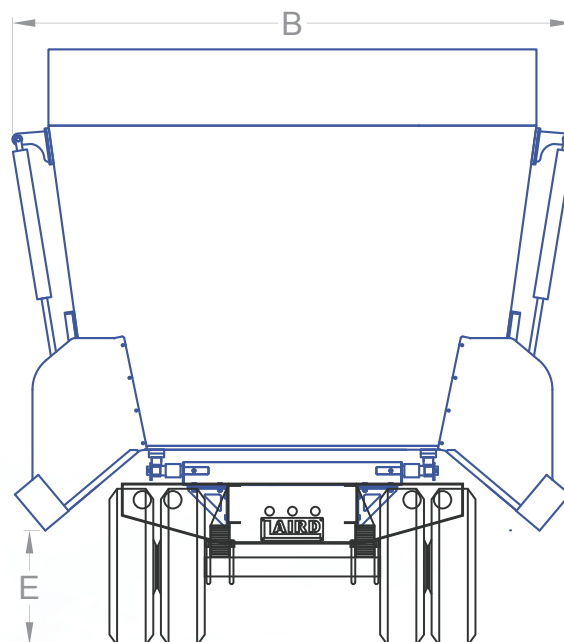

Performance, Longevity | Made in the U.S.A. 

Call Today 209-722-4146

* ALL HEIGHTS BASED ON 75R22.5 TIRES

[Return to Website Click Here](#)



VT-1500 XL VERTICAL TRUCK - HYDROSTATIC SYSTEM

(TWIN AUGER)

VT-1500 XL STANDARD EQUIPMENT

1. 1500 Cu.Ft. Mixing Chamber 17Ft. Side Wall
Plus 12" Steel Extension Plus 8" Belt Extension
2. 1" Steel Sub-Floor & 6mm | 0.236 in Stainless Steel Baffles
3. One Vertical Auger with 5mm Stainless Steel On Bottom
Flight, 3mm Stainless Steel Auger Cap, & Stainless Round
Bar Around Perimeter
4. Two Heavy Duty Planetary Gear Boxes Integrated
With Bent Axis Hydraulic Motors
5. Standard Discharge Conveyor (L) Hydraulically Adjustable -
Stainless Steel 8.5' (C-2082 Roller Chain)
6. Complete Hydrostatic System to Drive the Augers,
Discharge Conveyor, & Open the Discharge Door
7. Reversible Hydraulic Fan With Automatic Self Cleaning Cycle
(Includes Thermal Valve for Cold Climates)
8. Plus One Controller With Joystick Controls
9. 4 X 30,000 Lbs. Capacity Weighbars - 3.5" Diameter
10. 10 High Quality Busatis Blades (5 Per Auger)
Plus Two Counter Knives
11. Painted Laird White With Blue Trim


[Return to Website Click Here](#)



VT-1800 VERTICAL TRUCK - HYDROSTATIC SYSTEM


(TRIPLE AUGER)

VT-1800 DIAGRAM

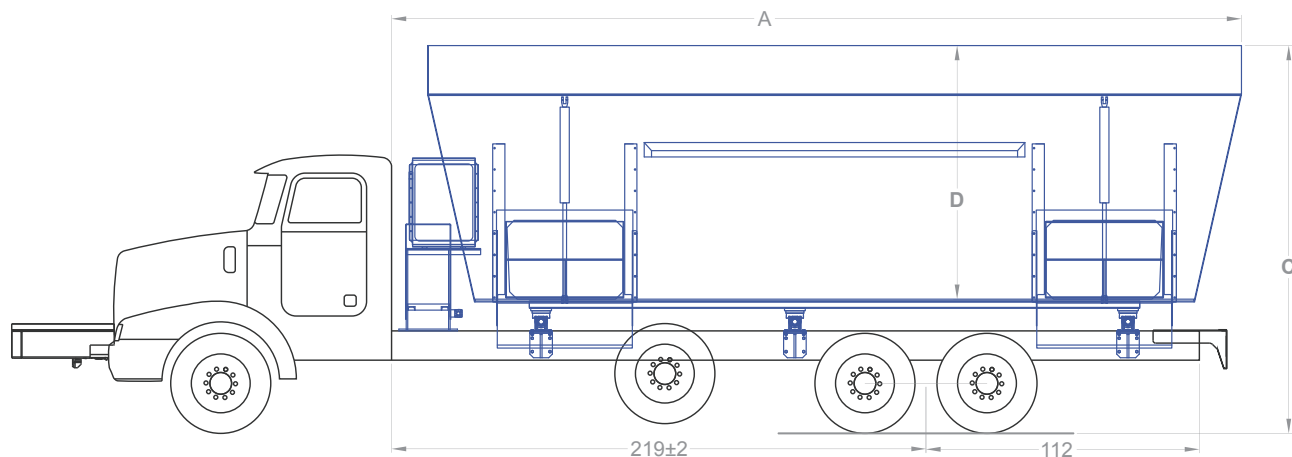

UNIT SPECIFICATIONS	
NUMBER OF AUGERS	3
VOLUME (CU.FT.)	1867
MAX LOAD @ 25LBS/CU.FT.	46675
A OVERALL LENGTH FRONT MOUNT	348.00"
B OVERALL WIDTH SIDE DOORS	137.25"
C OVERALL HEIGHT	159.00"
D CHAMBER DEPTH	104.00"
E SIDE DOOR CHUTE CLEARANCE	32.75"
TRUCK MIN. HORSE POWER	500
NUMBER OF AXLES	3
BASED ON FRAME HEIGHT	42

* ALL HEIGHTS BASED ON 75R22.5 TIRES

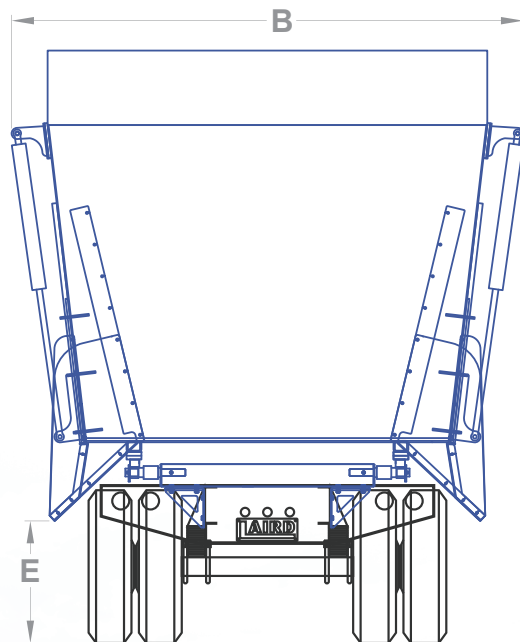

Performance, Longevity | Made in the U.S.A. 
& Quality Service

Call Today 209-722-4146

[Return to Website Click Here](#)



VT-1800 VERTICAL TRUCK - HYDROSTATIC SYSTEM

(TRIPLE AUGER)

VT-1800

STANDARD EQUIPMENT

1. 1800 Cu.Ft. Mixing Chamber | 7Ft. Side Wall Plus 20" Steel Extension
2. 1" Steel Sub-Floor & 6mm | 0.236 in Stainless Steel Baffles
3. One Vertical Auger with 5mm Stainless Steel On Bottom Flight, 3mm Stainless Steel Auger Cap, & Stainless Round Bar Around Perimeter
4. Three Heavy Duty Planetary Gear Boxes Integrated With Bent Axis Hydraulic Motors
5. 2 Side Doors Left (Front & Rear) With Slide Chutes
6. Complete Hydrostatic System With Double Pump Drive To Control Augers & Auxillary Functions
7. Reversible Hydraulic Fan With Automatic Self Cleaning Cycle (Includes Thermal Valve for Cold Climates)
8. Plus One Controller With Joystick Controls
9. 6 X 30,000 Lbs. Capacity Weigh Bars - 3.5" Diameter
10. 5 Premium Busatis Vertical Blades (Per Auger) + 2 Counter Knives - Includes Two Extra Kickers For Front & Rear Augers
11. Painted Laird White With Blue Trim

[Return to Website Click Here](#)





Cattle Feeding Equipment & Solutions



531 S. Hwy. 59 | Merced, CA 95341
P: (209) 722-4145 | F: (209) 349-8934 | sales@lairdmfg.com | www.lairdmfg.com

[Return to Website Click Here](http://www.lairdmfg.com)