

A black and white cow is the central focus, looking directly at the camera. It is in a feedlot with other cows in the background. The ground is covered in straw and hay. The sky is blue with some clouds.

LAIRD

MANUFACTURING

"We are the Exception not the Compromise."

**VERTICAL
TRUCK-MOUNT**

WIDE BODY

[TABLE OF CONTENTS]

VT-600 CUFT VERTICAL MIXER TRUCK-MOUNT [REPTO] (SINGLE-SCREW, WIDE BODY)	3
<i>DIAGRAM</i>	3
<i>STANDARD EQUIPMENT DETAILS</i>	4
VT-600 CUFT VERTICAL MIXER TRUCK-MOUNT [FEPTO] (SINGLE-SCREW, WIDE BODY)	5
<i>DIAGRAM</i>	5
<i>STANDARD EQUIPMENT DETAILS</i>	6
VT-1000 CUFT VERTICAL TRUCK-MOUNT [REPTO] (TWIN-SCREW, WIDE BODY)	7
<i>DIAGRAM</i>	7
<i>STANDARD EQUIPMENT DETAILS</i>	8
VT-1000 CUFT VERTICAL TRUCK-MOUNT [FEPTO] (TWIN-SCREW, WIDE BODY)	9
<i>DIAGRAM</i>	9
<i>STANDARD EQUIPMENT DETAILS</i>	10
VT-1200 CUFT VERTICAL TRUCK-MOUNT [REPTO] (TWIN-SCREW, WIDE BODY)	11
<i>DIAGRAM</i>	11
<i>STANDARD EQUIPMENT DETAILS</i>	12
VT-1200 CUFT VERTICAL TRUCK-MOUNT [FEPTO] (TWIN-SCREW, WIDE BODY)	13
<i>DIAGRAM</i>	13
<i>STANDARD EQUIPMENT DETAILS</i>	14
VT-1400 CUFT VERTICAL MIXER TRUCK-MOUNT [REPTO] (TWIN-SCREW, WIDE BODY)	15
<i>DIAGRAM</i>	15
<i>STANDARD EQUIPMENT DETAILS</i>	16
VT-1400 CUFT VERTICAL MIXER TRUCK-MOUNT [FEPTO] (TWIN-SCREW, WIDE BODY)	17
<i>DIAGRAM</i>	17
<i>STANDARD EQUIPMENT DETAILS</i>	18
VT-1500 CUFT VERTICAL MIXER TRUCK-MOUNT [REPTO] (TWIN-SCREW, WIDE BODY)	19
<i>DIAGRAM</i>	19
<i>STANDARD EQUIPMENT DETAILS</i>	20


[TABLE OF CONTENTS: CONT]

VT-1500 CUFT VERTICAL MIXER TRUCK-MOUNT [FEPTO] (TWIN-SCREW, WIDE BODY)	21
<i>DIAGRAM</i>	21
<i>STANDARD EQUIPMENT DETAILS</i>	22
OPTIONS	23
SPECIFICATION SHEET	25

VT-600 CUFT VERTICAL MIXER TRUCK-MOUNT


[REPTO] (SINGLE-SCREW, WIDE BODY)

[DIAGRAM]

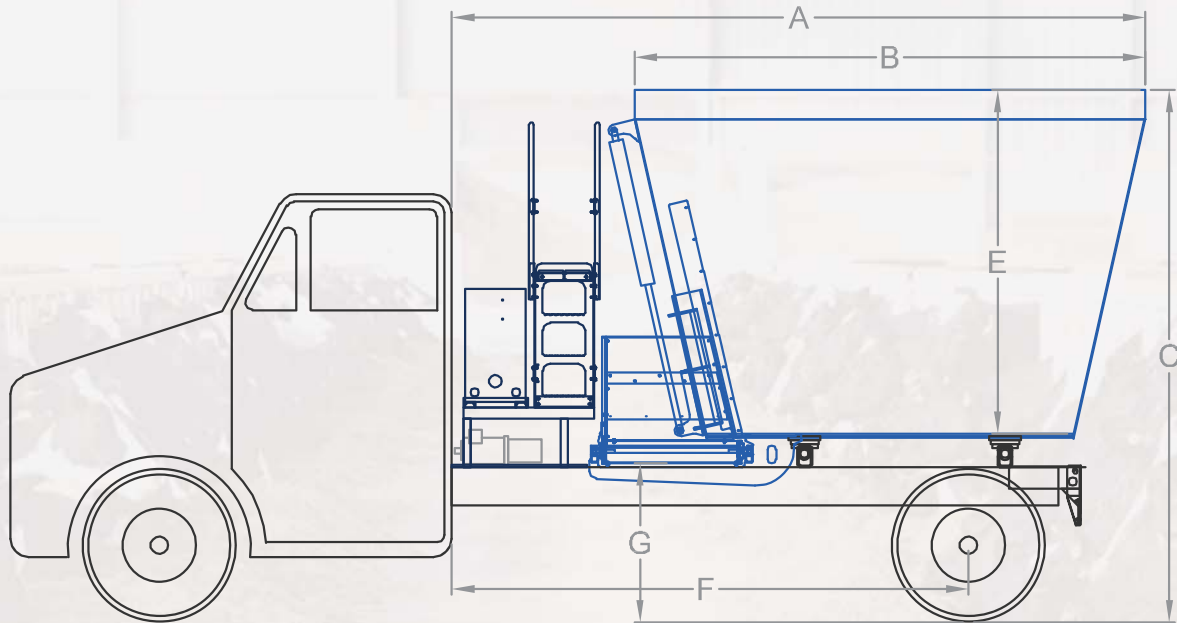

UNIT SPECIFICATIONS

	NUMBER OF SCREWS	1
	VOLUME (CU.FT.)	541
	MAX LOAD @ 25LBS/CU.FT.	13525
A	OVERALL LENGTH REPTO	186"
B	MIXING CHAMBER LENGTH	137"
C	OVERALL HEIGHT	142"
D	CHAMBER OVERALL WIDTH	118"
E	MIXING CHAMBER DEPTH	92"
F	CAB TO TRUNNION REPTO	138"
G	DISCHARGE CLEARANCE (STD. FLAT)	43"
	PIVOT DISCHARGE @ MIN. CLEARANCE	47"
	DISCHARGE CLEARANCE (STD+CHUTE)	30"
H	SIDE DOOR CHUTE CLEARANCE	34"
	MIN. TRUCK HORSE POWER	200

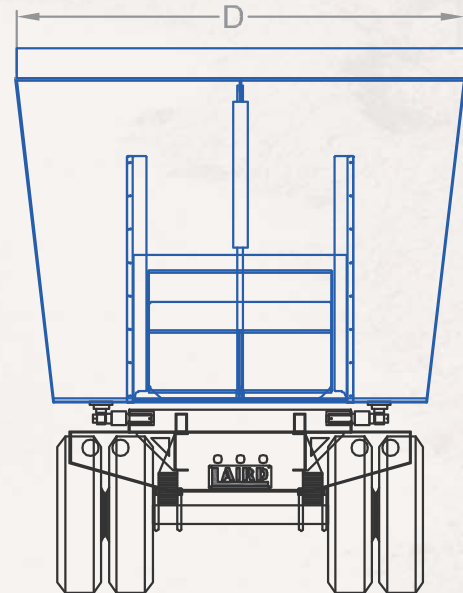

* ALL RELATED HEIGHTS BASED ON 41½ FRAME HEIGHT TO GROUND LEVEL.

VT-600 (R)

VT-600 CUFT VERTICAL MIXER TRUCK-MOUNT

[REPTO] (SINGLE-SCREW, WIDE BODY)

[STANDARD EQUIPMENT]

1. 600 CUFT Mixing Chamber (7 FT Side Wall)
2. ¾" Floor Thickness
3. Stainless Steel Liner on Floor (3mm)
4. One Vertical Auger with Stainless Steel on the Perimeters. Stainless Steel Cap (3mm) on the 3' of the Leading Edge
5. Hydraulically Adjustable Chain Discharge, Discharging on the Driver's Side (Stainless Steel)
6. Complete Hydrostatic System to Drive the Augers, Discharge Conveyor and Open the Discharge Door.
7. Plus One Controller with Joystick
8. One Heavy Duty Gearboxes Complete with Radial Piston Motor
9. Large Discharge Door Located at the Front of the Box
10. 4 - Digistar Weigh Bars with 10,000 lbs. Capacity
11. Two Counter-Knives
12. 9 High Quality Tungsten Vertical Blades (2-Piece) or 9 Busatis Blades or 9 Feedlot Backing Plates (Stainless Steel Lined)
13. Painted White with Blue Trim
14. Reversible Hydraulic Fan with Automatic Self-Cleaning Cycle
15. Thermal Valve for Cold Climates




VT-600 (R)

VT-600 CUFT VERTICAL MIXER TRUCK-MOUNT


[FEPTO] (SINGLE-SCREW, WIDE BODY)

[DIAGRAM]

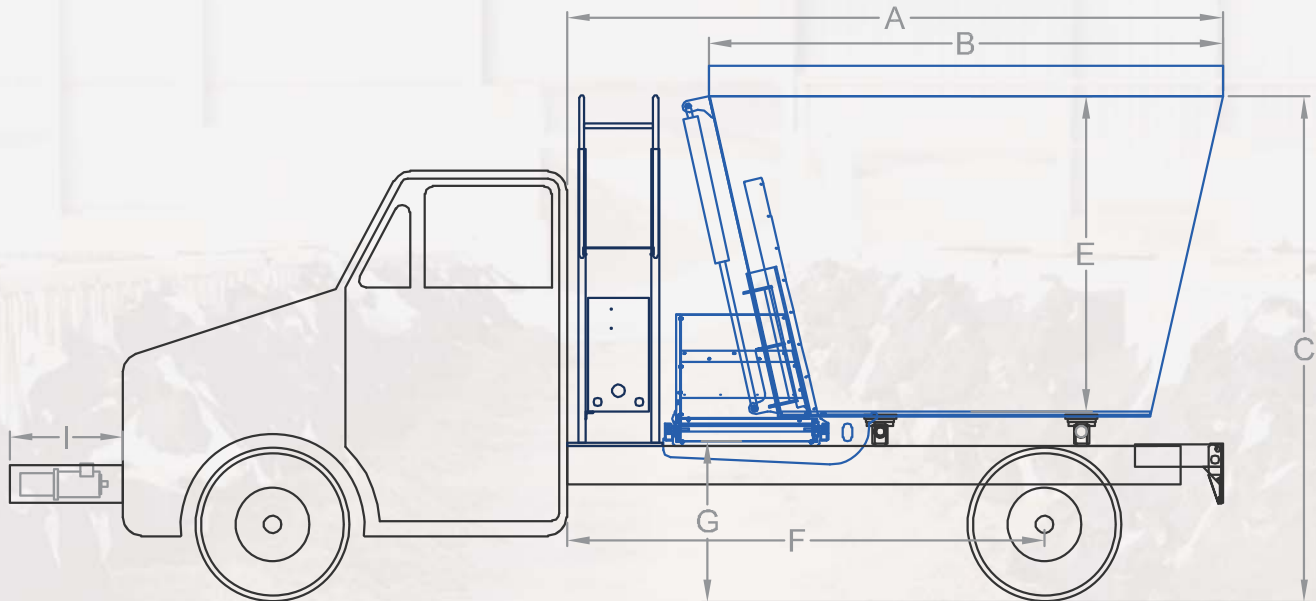

UNIT SPECIFICATIONS

	NUMBER OF SCREWS	1
	VOLUME (CU.FT.)	541
	MAX LOAD @ 25LBS/CU.FT.	13525
A	OVERALL LENGTH FEPTO	174"
B	MIXING CHAMBER LENGTH	137"
C	OVERALL HEIGHT	142"
D	CHAMBER OVERALL WIDTH	118"
E	MIXING CHAMBER DEPTH	92"
F	CAB TO TRUNNION FEPTO	126"
G	DISCHARGE CLEARANCE (STD. FLAT)	43"
	PIVOT DISCHARGE @ MIN. CLEARANCE	47"
	DISCHARGE CLEARANCE (STD+CHUTE)	30"
H	SIDE DOOR CHUTE CLEARANCE	34"
I	PUMP MOUNT LENGTH @ FRONT	30
	MIN. TRUCK HORSE POWER	200

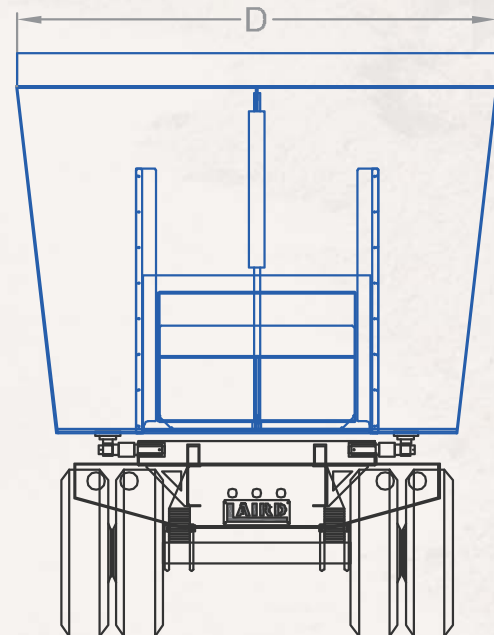

* ALL RELATED HEIGHTS BASED ON 41½ FRAME HEIGHT TO GROUND LEVEL.

VT-600 (F)

VT-600 CUFT VERTICAL MIXER TRUCK-MOUNT

[FEPT0] (SINGLE-SCREW, WIDE BODY)

[STANDARD EQUIPMENT]

1. 600 CUFT Mixing Chamber (7 FT Side Wall)
2. ¾" Floor Thickness
3. Stainless Steel Liner on Floor (3mm)
4. One Vertical Auger with Stainless Steel on the Perimeters. Stainless Steel Cap (3mm) on the 3' of the Leading Edge
5. Hydraulically Adjustable Chain Discharge, Discharging on the Driver's Side (Stainless Steel)
6. Complete Hydrostatic System to Drive the Augers, Discharge Conveyor and Open the Discharge Door.
7. Plus One Controller with Joystick
8. One Heavy Duty Gearboxes Complete with Radial Piston Motor
9. Large Discharge Door Located at the Front of the Box
10. 4 - Digistar Weigh Bars with 10,000 lbs. Capacity
11. Two Counter-Knives
12. 9 High Quality Tungsten Vertical Blades (2-Piece) or 9 Busatis Blades or 9 Feedlot Backing Plates (Stainless Steel Lined)
13. Painted White with Blue Trim
14. Reversible Hydraulic Fan with Automatic Self-Cleaning Cycle
15. Thermal Valve for Cold Climates




VT-600 (F)

VT-1000 CUFT VERTICAL MIXER TRUCK-MOUNT


[REPTO] (TWIN-SCREW, WIDE BODY)

[DIAGRAM]

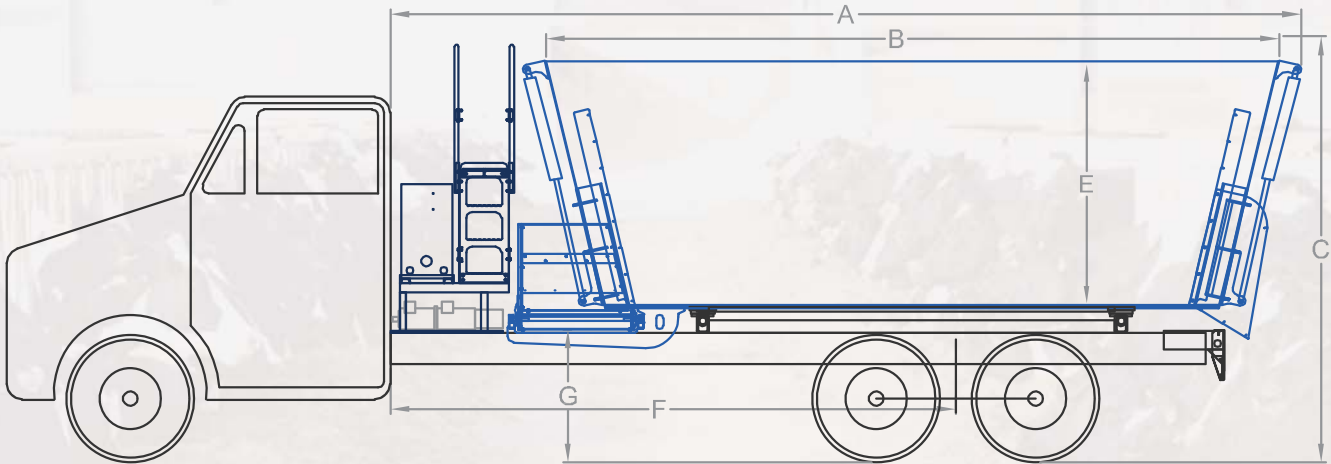

UNIT SPECIFICATIONS

	NUMBER OF SCREWS	2
	VOLUME (CU.FT.)	884
	MAX LOAD @ 25LBS/CU.FT.	22100
A	OVERALL LENGTH REPTO	292"
B	MIXING CHAMBER LENGTH	232"
C	OVERALL HEIGHT	128"
D	CHAMBER OVERALL WIDTH	116"
E	MIXING CHAMBER DEPTH	78"
F	CAB TO TRUNNION REPTO	181"
G	DISCHARGE CLEARANCE (STD. FLAT)	43"
	PIVOT DISCHARGE @ MIN. CLEARANCE	47"
	DISCHARGE CLEARANCE (STD+CHUTE)	30"
H	SIDE DOOR CHUTE CLEARANCE	34"
	MIN. TRUCK HORSE POWER	350

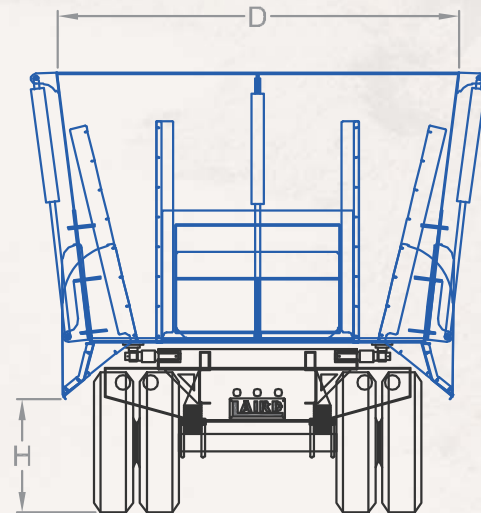

* ALL RELATED HEIGHTS BASED ON 41½ FRAME HEIGHT TO GROUND LEVEL.

VT-1000 CUFT VERTICAL MIXER TRUCK-MOUNT

[REPTO] (TWIN-SCREW, WIDE BODY)

[STANDARD EQUIPMENT]

1. 1000 CUFT Mixing Chamber (6 ½ FT Side Wall)
2. ¾" Floor Thickness
3. Stainless Steel Liner on Floor (3mm)
4. Two Vertical Augers with Stainless Steel on the Perimeters. Stainless Steel Cap (3mm) on the First Three Feet of the Leading Edge.
5. Hydraulically Adjustable Chain Discharge, Discharging on the Driver's Side (Stainless Steel)
6. Complete Hydrostatic System to Drive the Augers, Discharge Conveyor and Open the Discharge Door.
7. Plus One Controller with Joystick
8. Two Heavy Duty Gearboxes Complete with Radial Piston Motor
9. Large Discharge Door Located at the Front of the Box
10. 4 - Digistar Weigh Bars with 10,000 lbs. Capacity
11. Two Counter-Knives
12. 18 High Quality Tungsten Vertical Blades (2 Piece) or 18 Busatis Blades or 18 Feedlot Backing Plates (Stainless Steel Lined)
13. Painted White with Blue Trim
14. Reversible Hydraulic Fan with Automatic Self-Cleaning Cycle
15. Thermal Valve for Cold Climates




VT-1000 (R)

VT-1000 CUFT VERTICAL MIXER TRUCK-MOUNT


[FEPTO] (TWIN-SCREW, WIDE BODY)

[DIAGRAM]

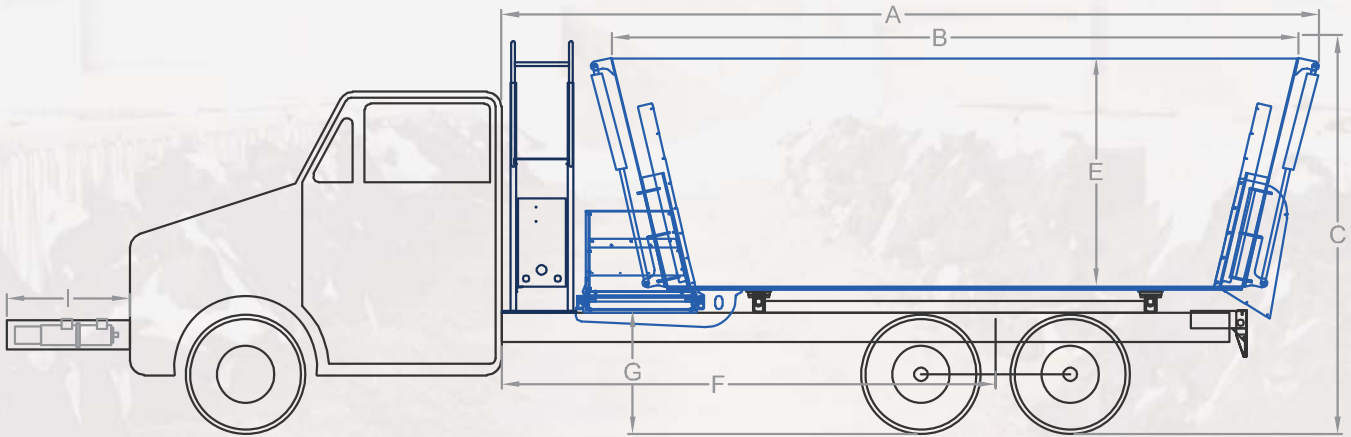

UNIT SPECIFICATIONS

	NUMBER OF SCREWS	2
	VOLUME (CU.FT.)	884
	MAX LOAD @ 25LBS/CU.FT.	22100
A	OVERALL LENGTH FEPTO	280"
B	MIXING CHAMBER LENGTH	232"
C	OVERALL HEIGHT	128"
D	CHAMBER OVERALL WIDTH	116"
E	MIXING CHAMBER DEPTH	78"
F	CAB TO TRUNNION FEPTO	169"
G	DISCHARGE CLEARANCE (STD. FLAT)	43"
	PIVOT DISCHARGE @ MIN. CLEARANCE	47"
	DISCHARGE CLEARANCE (STD+CHUTE)	30"
H	SIDE DOOR CHUTE CLEARANCE	34"
I	PUMP MOUNT LENGTH @ FRONT	52
	MIN. TRUCK HORSE POWER	350

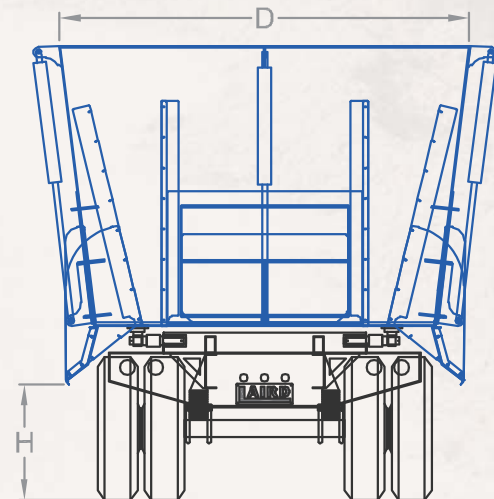

* ALL RELATED HEIGHTS BASED ON 41½ FRAME HEIGHT TO GROUND LEVEL.

VT-1000 (F)

VT-1000 CUFT VERTICAL MIXER TRUCK-MOUNT

[FEPTO] (TWIN-SCREW, WIDE BODY)

[STANDARD EQUIPMENT]

1. 1000 CUFT Mixing Chamber (6 ½ FT Side Wall)
2. ¾" Floor Thickness
3. Stainless Steel Liner on Floor (3mm)
4. Two Vertical Augers with Stainless Steel on the Perimeters. Stainless Steel Cap (3mm) on the First Three Feet of the Leading Edge.
5. Hydraulically Adjustable Chain Discharge, Discharging on the Driver's Side (Stainless Steel)
6. Complete Hydrostatic System to Drive the Augers, Discharge Conveyor and Open the Discharge Door.
7. Plus One Controller with Joystick
8. Two Heavy Duty Gearboxes Complete with Radial Piston Motor
9. Large Discharge Door Located at the Front of the Box
10. 4 - Digistar Weigh Bars with 10,000 lbs. Capacity
11. Two Counter-Knives
12. 18 High Quality Tungsten Vertical Blades (2 Piece) or 18 Busatis Blades or 18 Feedlot Backing Plates (Stainless Steel Lined)
13. Painted White with Blue Trim
14. Reversible Hydraulic Fan with Automatic Self-Cleaning Cycle
15. Thermal Valve for Cold Climates




VT-1000 (F)

VT-1200 CUFT VERTICAL MIXER TRUCK-MOUNT


[REPTO] (TWIN-SCREW, WIDE BODY)

[DIAGRAM]

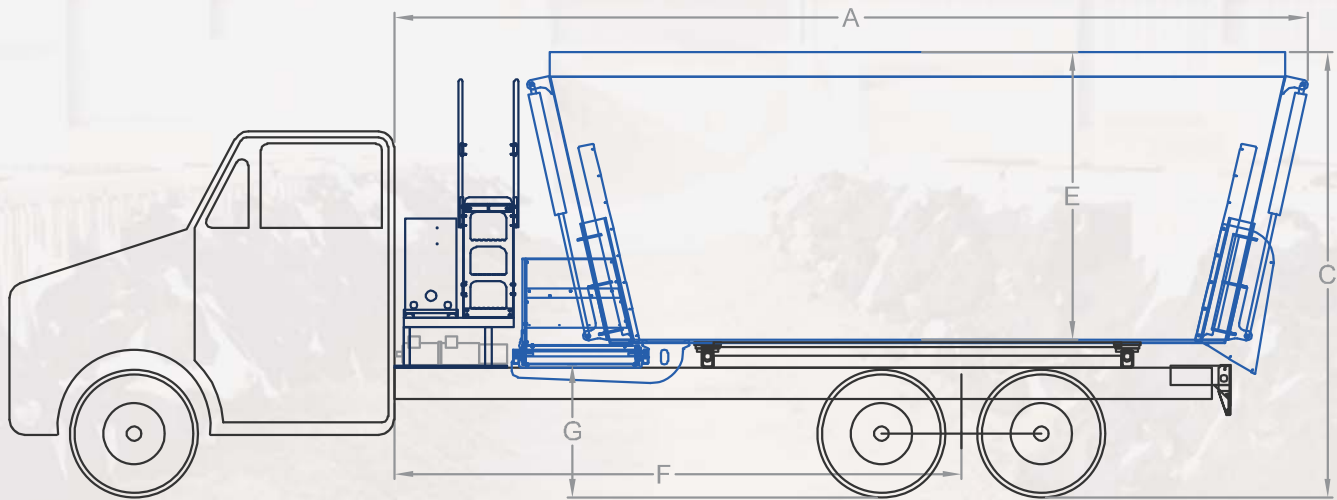

UNIT SPECIFICATIONS

	NUMBER OF SCREWS	2
	VOLUME (CU.FT.)	1084
	MAX LOAD @ 25LBS/CU.FT.	27100
A	OVERALL LENGTH REPTO	292"
B	MIXING CHAMBER LENGTH	235"
C	OVERALL HEIGHT	142"
D	CHAMBER OVERALL WIDTH	118"
E	MIXING CHAMBER DEPTH	92"
F	CAB TO TRUNNION REPTO	181"
G	DISCHARGE CLEARANCE (STD. FLAT)	43"
	PIVOT DISCHARGE @ MIN. CLEARANCE	47"
	DISCHARGE CLEARANCE (STD+CHUTE)	30"
H	SIDE DOOR CHUTE CLEARANCE	34"
	MIN. TRUCK HORSE POWER	350

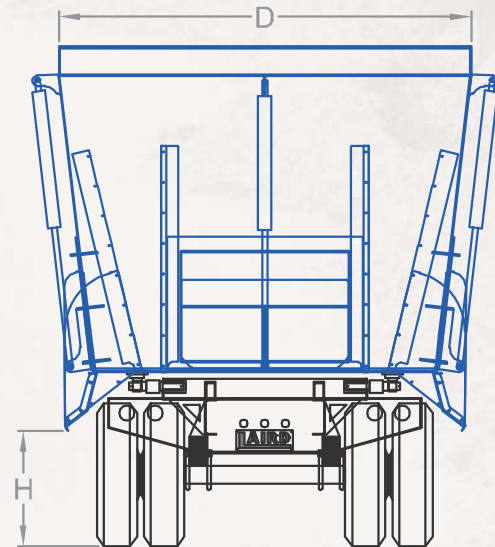

* ALL RELATED HEIGHTS BASED ON 41½ FRAME HEIGHT TO GROUND LEVEL.

VT-1200 CUFT VERTICAL MIXER TRUCK-MOUNT

[REPTO] (TWIN-SCREW, WIDE BODY)

[STANDARD EQUIPMENT]

1. 1200 CUFT Mixing Chamber (7 FT Side Wall Plus 8" Belting Extension)
2. ¾" Floor Thickness
3. Stainless Steel Liner on Floor (3mm)
4. Two Vertical Augers with Stainless Steel on the Perimeters. Stainless Steel Cap (3mm) on the First Three Feet of the Leading Edge.
5. Hydraulically Adjustable Chain Discharge, Discharging on the Driver's Side (Stainless Steel)
6. Complete Hydrostatic System to Drive the Augers, Discharge Conveyor and Open the Discharge Door.
7. Plus One Controller with Joystick
8. Two Heavy Duty Gearboxes Complete with Radial Piston Motor
9. Large Discharge Door Located at the Front of the Box
10. 4 - Digistar Weigh Bars with 15,000 lbs. Capacity
11. Two Counter-Knives
12. 18 High Quality Tungsten Vertical Blades (2 Piece) or 18 Busatis Blades or 18 Feedlot Backing Plates (Stainless Steel Lined)
13. Painted White with Blue Trim
14. Reversible Hydraulic Fan with Automatic Self-Cleaning Cycle
15. Thermal Valve for Cold Climates




VT-1200 (R)

VT-1200 CUFT VERTICAL MIXER TRUCK-MOUNT


[FEPTO] (TWIN-SCREW, WIDE BODY)

[DIAGRAM]

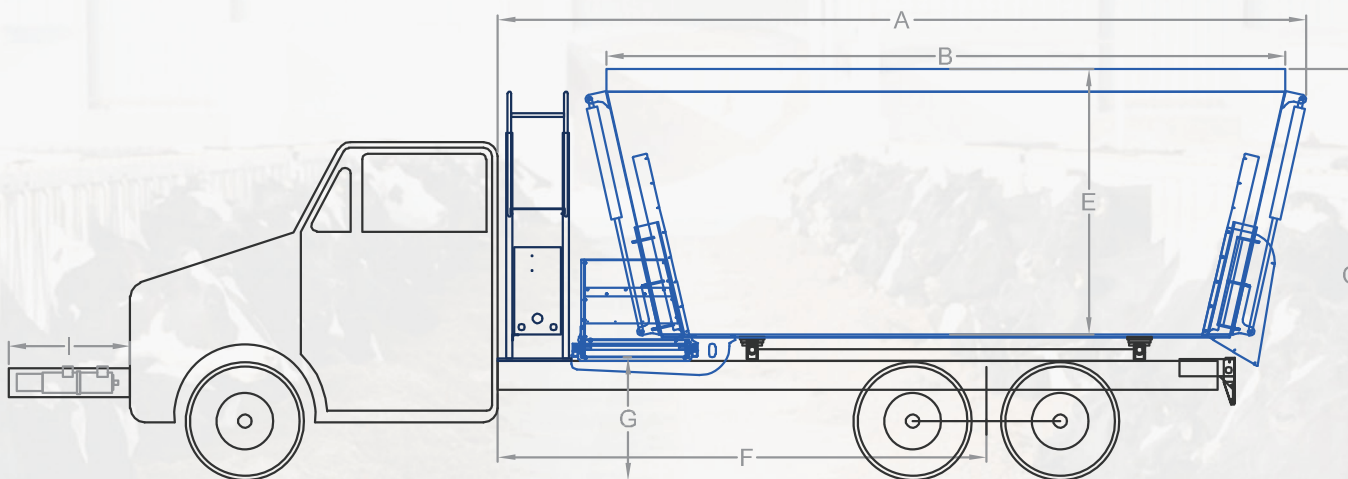

UNIT SPECIFICATIONS

	NUMBER OF SCREWS	2
	VOLUME (CU.FT.)	1084
	MAX LOAD @ 25LBS/CU.FT.	27100
A	OVERALL LENGTH FEPTO	280"
B	MIXING CHAMBER LENGTH	235"
C	OVERALL HEIGHT	142"
D	CHAMBER OVERALL WIDTH	118"
E	MIXING CHAMBER DEPTH	92"
F	CAB TO TRUNNION FEPTO	169"
G	DISCHARGE CLEARANCE (STD. FLAT)	43"
	PIVOT DISCHARGE @ MIN. CLEARANCE	47"
	DISCHARGE CLEARANCE (STD+CHUTE)	30"
H	SIDE DOOR CHUTE CLEARANCE	34"
I	PUMP MOUNT LENGTH @ FRONT	52
	MIN. TRUCK HORSE POWER	375

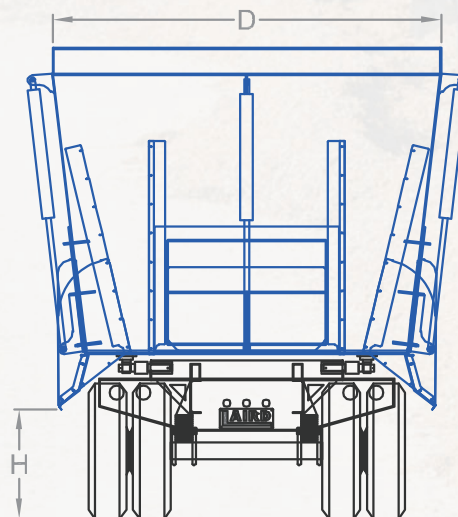

* ALL RELATED HEIGHTS BASED ON 41½ FRAME HEIGHT TO GROUND LEVEL.

VT-1200 (F)

VT-1200 CUFT VERTICAL MIXER TRUCK-MOUNT

[FEPTO] (TWIN-SCREW, WIDE BODY)

[STANDARD EQUIPMENT]

1. 1200 CUFT Mixing Chamber (7 FT Side Wall Plus 8" Belting Extension)
2. ¾" Floor Thickness
3. Stainless Steel Liner on Floor (3mm)
4. Two Vertical Augers with Stainless Steel on the Perimeters. Stainless Steel Cap (3mm) on the First Three Feet of the Leading Edge.
5. Hydraulically Adjustable Chain Discharge, Discharging on the Driver's Side (Stainless Steel)
6. Complete Hydrostatic System to Drive the Augers, Discharge Conveyor and Open the Discharge Door.
7. Plus One Controller with Joystick
8. Two Heavy Duty Gearboxes Complete with Radial Piston Motor
9. Large Discharge Door Located at the Front of the Box
10. 4 - Digistar Weigh Bars with 15,000 lbs. Capacity
11. Two Counter-Knives
12. 18 High Quality Tungsten Vertical Blades (2 Piece) or 18 Busatis Blades or 18 Feedlot Backing Plates (Stainless Steel Lined)
13. Painted White with Blue Trim
14. Reversible Hydraulic Fan with Automatic Self-Cleaning Cycle
15. Thermal Valve for Cold Climates




VT-1200 (F)

VT-1400 CUFT VERTICAL MIXER TRUCK-MOUNT


[REPTO] (TWIN-SCREW, WIDE BODY)

[DIAGRAM]

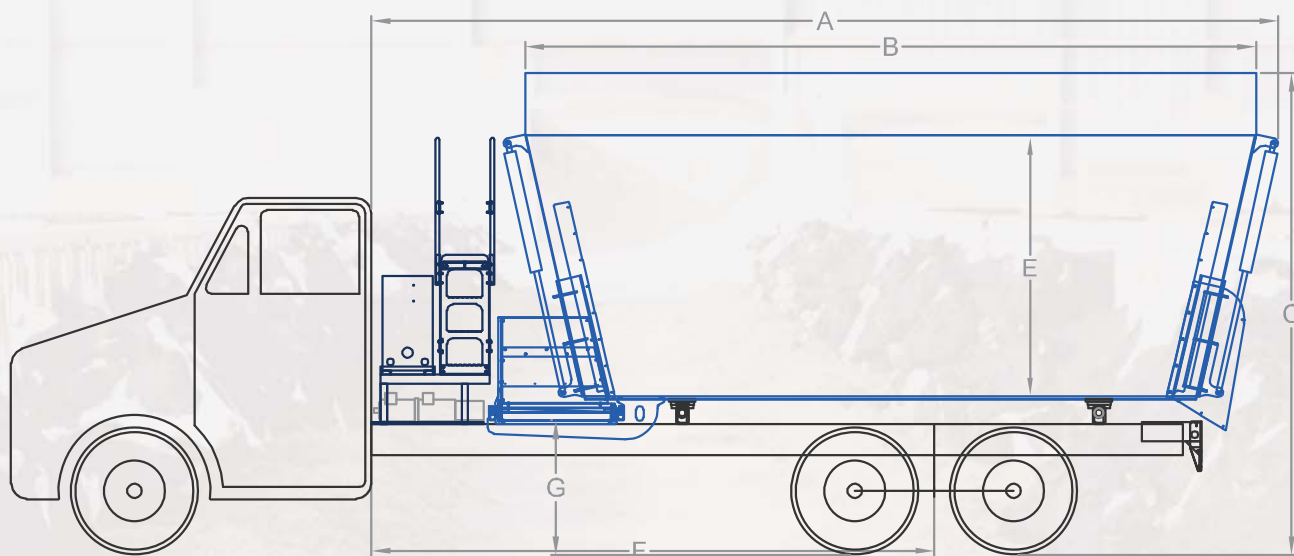

UNIT SPECIFICATIONS

	NUMBER OF SCREWS	2
	VOLUME (CU.FT.)	1255
	MAX LOAD @ 25LBS/CU.FT.	31375
A	OVERALL LENGTH REPTO	292"
B	MIXING CHAMBER LENGTH	235"
C	OVERALL HEIGHT	154"
D	CHAMBER OVERALL WIDTH	118"
E	MIXING CHAMBER DEPTH	104"
F	CAB TO TRUNNION REPTO	181"
G	DISCHARGE CLEARANCE (STD. FLAT)	43"
	PIVOT DISCHARGE @ MIN. CLEARANCE	47"
	DISCHARGE CLEARANCE (STD+CHUTE)	30"
H	SIDE DOOR CHUTE CLEARANCE	34"
	MIN. TRUCK HORSE POWER	350

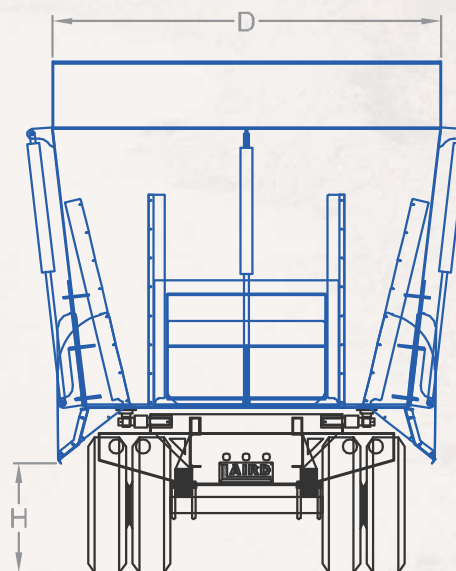

* ALL RELATED HEIGHTS BASED ON 41½ FRAME HEIGHT TO GROUND LEVEL.

VT-1400 CUFT VERTICAL MIXER TRUCK-MOUNT

[REPTO] (TWIN-SCREW, WIDE BODY)

[STANDARD EQUIPMENT]

1. 1400 CUFT Mixing Chamber (7 FT Side Wall Plus 20" Steel Extension)
2. ¾" Floor Thickness
3. Stainless Steel Liner on Floor (3mm)
4. Two Vertical Augers with Stainless Steel on the Perimeters. Stainless Steel Cap (3mm) on the First Three Feet of the Leading Edge.
5. Hydraulically Adjustable Chain Discharge, Discharging on the Driver's Side (Stainless Steel)
6. Complete Hydrostatic System to Drive the Augers, Discharge Conveyor and Open the Discharge Door.
7. Plus One Controller with Joystick
8. Two Heavy Duty Gearboxes Complete with Radial Piston Motor
9. Large Discharge Door Located at the Front of the Box
10. 4 - Digistar Weigh Bars with 15,000 lbs. Capacity
11. Two Counter-Knives
12. 18 High Quality Tungsten Vertical Blades (2 Piece) or 18 Busatis Blades or 18 Feedlot Backing Plates (Stainless Steel Lined)
13. Painted White with Blue Trim
14. Reversible Hydraulic Fan with Automatic Self-Cleaning Cycle
15. Thermal Valve for Cold Climates




VT-1400 (R)

VT-1400 CUFT VERTICAL MIXER TRUCK-MOUNT


[FEPTO] (TWIN-SCREW, WIDE BODY)

[DIAGRAM]

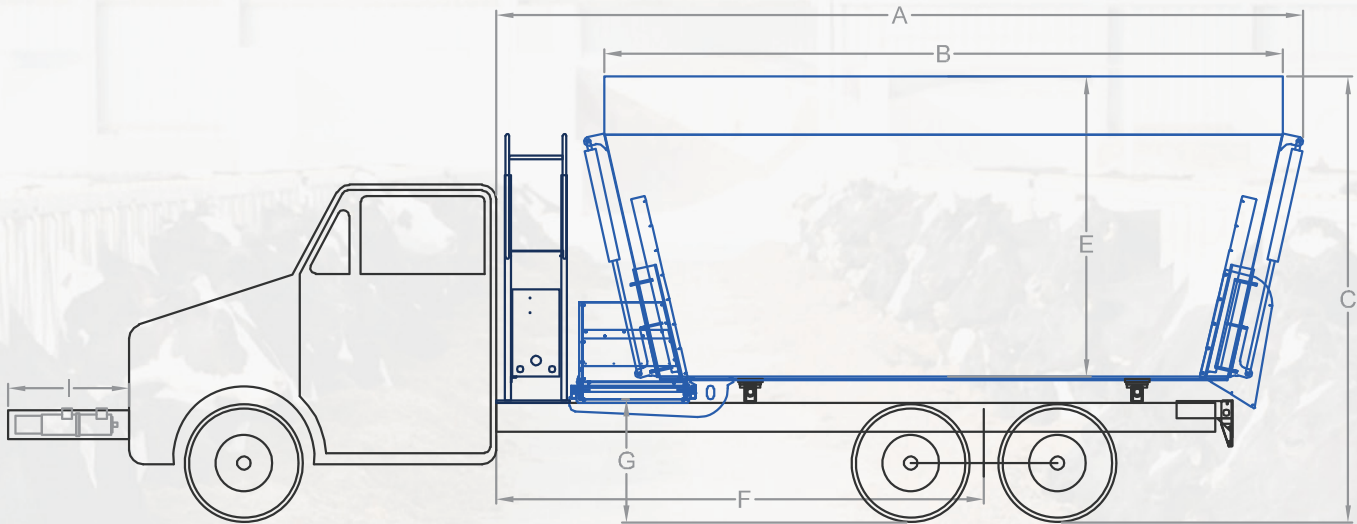

UNIT SPECIFICATIONS

	NUMBER OF SCREWS	2
	VOLUME (CU.FT.)	1255
	MAX LOAD @ 25LBS/CU.FT.	31375
A	OVERALL LENGTH FEPTO	280"
B	MIXING CHAMBER LENGTH	235"
C	OVERALL HEIGHT	154"
D	CHAMBER OVERALL WIDTH	118"
E	MIXING CHAMBER DEPTH	104"
F	CAB TO TRUNNION FEPTO	169"
G	DISCHARGE CLEARANCE (STD. FLAT)	43"
	PIVOT DISCHARGE @ MIN. CLEARANCE	47"
	DISCHARGE CLEARANCE (STD+CHUTE)	30"
H	SIDE DOOR CHUTE CLEARANCE	34"
I	PUMP MOUNT LENGTH @ FRONT	52
	MIN. TRUCK HORSE POWER	420

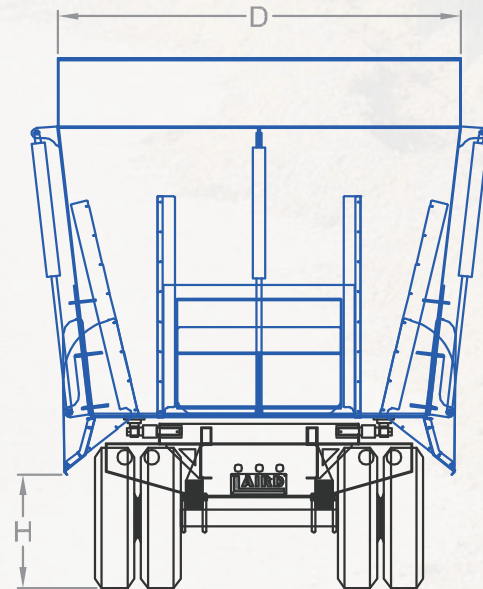

* ALL RELATED HEIGHTS BASED ON 41½ FRAME HEIGHT TO GROUND LEVEL.

VT-1400 (F)

VT-1400 CUFT VERTICAL MIXER TRUCK-MOUNT

[FEPTO] (TWIN-SCREW, WIDE BODY)

[STANDARD EQUIPMENT]

1. 1400 CUFT Mixing Chamber (7 FT Side Wall Plus 20" Steel Extension)
2. ¾" Floor Thickness
3. Stainless Steel Liner on Floor (3mm)
4. Two Vertical Augers with Stainless Steel on the Perimeters. Stainless Steel Cap (3mm) on the First Three Feet of the Leading Edge.
5. Hydraulically Adjustable Chain Discharge, Discharging on the Driver's Side (Stainless Steel)
6. Complete Hydrostatic System to Drive the Augers, Discharge Conveyor and Open the Discharge Door.
7. Plus One Controller with Joystick
8. Two Heavy Duty Gearboxes Complete with Radial Piston Motor
9. Large Discharge Door Located at the Front of the Box
10. 4 - Digistar Weigh Bars with 15,000 lbs. Capacity
11. Two Counter-Knives
12. 18 High Quality Tungsten Vertical Blades (2 Piece) or 18 Busatis Blades or 18 Feedlot Backing Plates (Stainless Steel Lined)
13. Painted White with Blue Trim
14. Reversible Hydraulic Fan with Automatic Self-Cleaning Cycle
15. Thermal Valve for Cold Climates




VT-1400 (F)

VT-1500 CUFT VERTICAL MIXER TRUCK-MOUNT


[REPTO] (TWIN-SCREW, WIDE BODY)

[DIAGRAM]

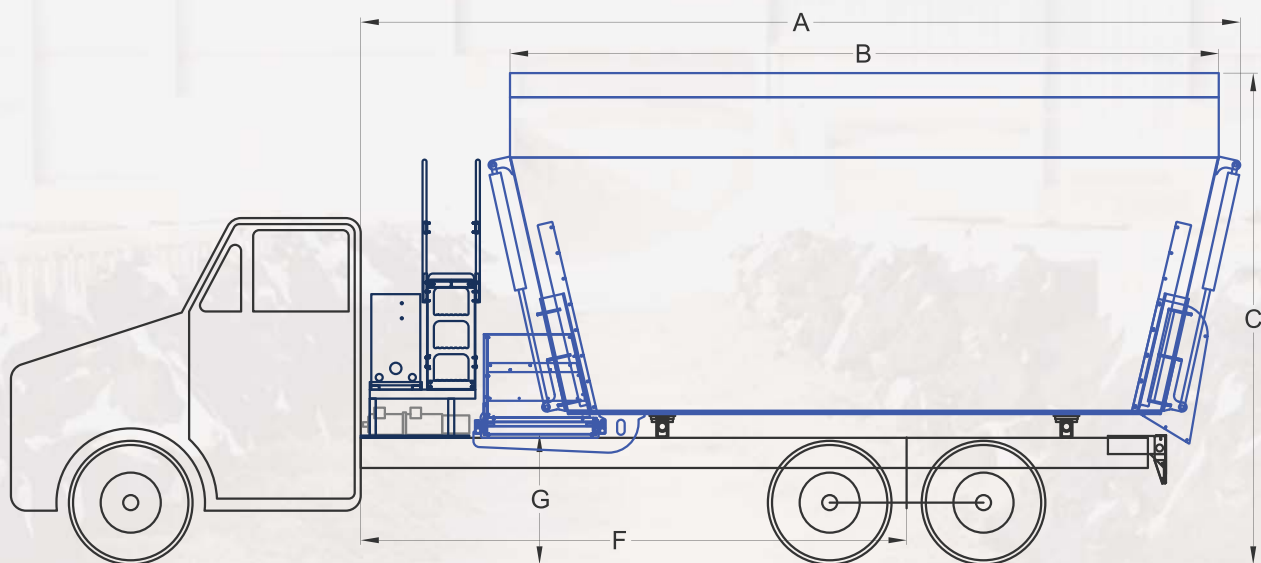

UNIT SPECIFICATIONS

	NUMBER OF SCREWS	2
	VOLUME (CU.FT.)	1369
	MAX LOAD @ 25LBS/CU.FT.	34225
A	OVERALL LENGTH REPTO	310"
B	MIXING CHAMBER LENGTH	235"
C	OVERALL HEIGHT	150"
D	CHAMBER OVERALL WIDTH	118"
E	MIXING CHAMBER DEPTH	104"
F	CAB TO TRUNNION REPTO	181"
G	DISCHARGE CLEARANCE (STD. FLAT)	43"
	DISCHARGE CLEARANCE (DOGLEG)	47"
	DISCHARGE CLEARANCE (STD+CHUTE)	30"
H	SIDE DOOR CHUTE CLEARANCE	34"
	MIN. TRUCK HORSE POWER	350

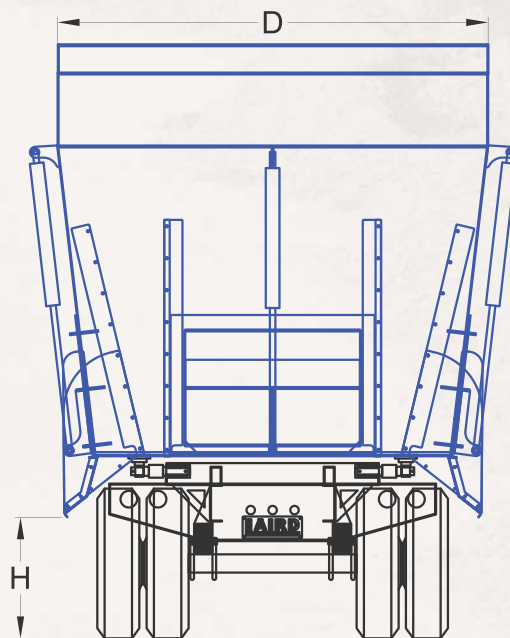

* ALL RELATED HEIGHTS BASED ON 41½ FRAME HEIGHT TO GROUND LEVEL.

VT-1500 CUFT VERTICAL MIXER TRUCK-MOUNT

[REPTO] (TWIN-SCREW, WIDE BODY)

[STANDARD EQUIPMENT]

1. 1500 CUFT Mixing Chamber (7FT Side Wall Plus 20" Steel Extension Plus 8" Belt Extension)
2. ¾" Floor Thickness
3. Stainless Steel Liner on Floor (3mm)
4. Two Vertical Augers with Stainless Steel on the Perimeters. Stainless Steel Cap (3mm) on the First Three Feet of the Leading Edge.
5. Hydraulically Adjustable Chain Discharge, Discharging on the Driver's Side (Stainless Steel)
6. Complete Hydrostatic System to Drive the Augers, Discharge Conveyor and Open the Discharge Door.
7. Plus One Controller with Joystick
8. Two Heavy Duty Gearboxes Complete with Radial Piston Motor
9. Large Discharge Door Located at the Front of the Box
10. 4 - Digistar Weigh Bars with 15,000 lbs. Capacity
11. Two Counter-Knives
12. 18 High Quality Tungsten Vertical Blades (2 Piece) or 18 Busatis Blades or 18 Feedlot Backing Plates (Stainless Steel Lined)
13. Painted White with Blue Trim
14. Reversible Hydraulic Fan with Automatic Self-Cleaning Cycle
15. Thermal Valve for Cold Climates




VT-1500 (R)

VT-1500 CUFT VERTICAL MIXER TRUCK-MOUNT


[FEPTO] (TWIN-SCREW, WIDE BODY)

[DIAGRAM]

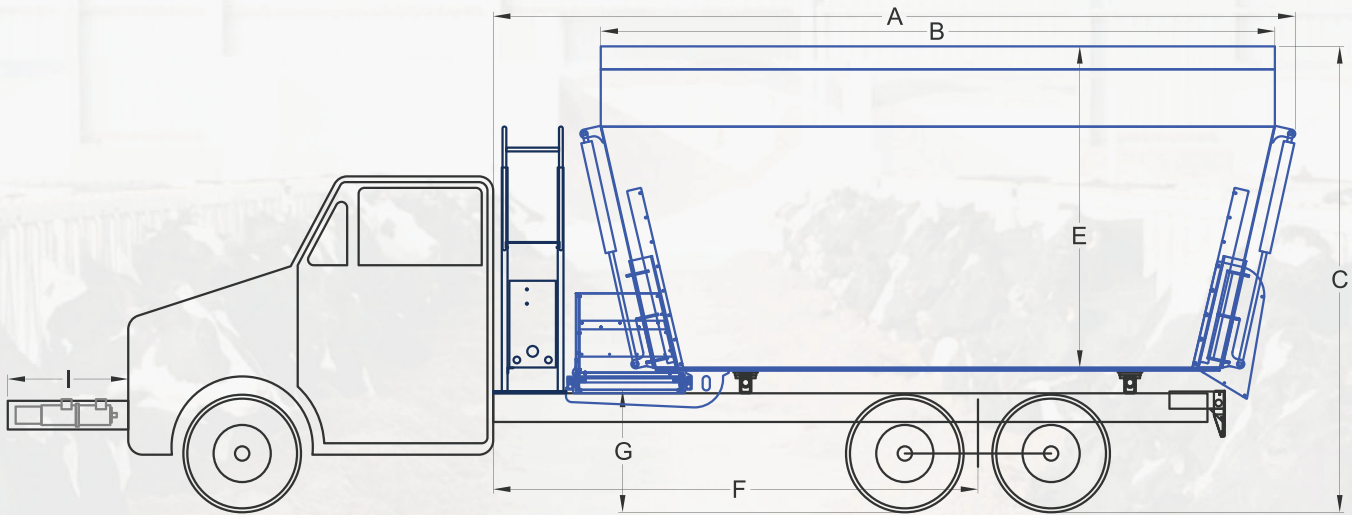

UNIT SPECIFICATIONS

	NUMBER OF SCREWS	2
	VOLUME (CU.FT.)	1369
	MAX LOAD @ 25LBS/CU.FT.	34225
A	OVERALL LENGTH FEPTO	280"
B	MIXING CHAMBER LENGTH	235"
C	OVERALL HEIGHT	150"
D	CHAMBER OVERALL WIDTH	118"
E	MIXING CHAMBER DEPTH	104"
F	CAB TO TRUNNION FEPTO	169"
G	DISCHARGE CLEARANCE (STD. FLAT)	43"
	DISCHARGE CLEARANCE (DOGLEG)	47"
	DISCHARGE CLEARANCE (STD+CHUTE)	30"
H	SIDE DOOR CHUTE CLEARANCE	34"
I	PUMP MOUNT LENGTH @ FRONT	52
	MIN. TRUCK HORSE POWER	420

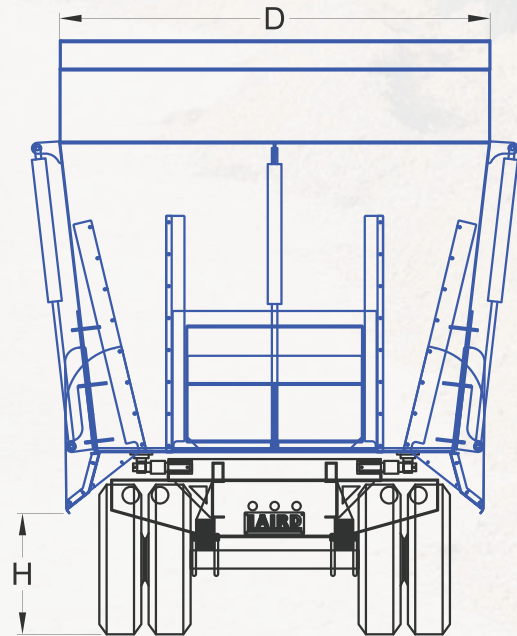

* ALL RELATED HEIGHTS BASED ON 41½ FRAME HEIGHT TO GROUND LEVEL.

VT-1500 (F)

VT-1500 CUFT VERTICAL MIXER TRUCK-MOUNT

[FEPTO] (TWIN-SCREW, WIDE BODY)

[STANDARD EQUIPMENT]

1. 1500 CUFT Mixing Chamber (7FT Side Wall Plus 20" Steel Extension Plus 8" Belt Extension)
2. ¾" Floor Thickness
3. Stainless Steel Liner on Floor (3mm)
4. Two Vertical Augers with Stainless Steel on the Perimeters. Stainless Steel Cap (3mm) on the First Three Feet of the Leading Edge.
5. Hydraulically Adjustable Chain Discharge, Discharging on the Driver's Side (Stainless Steel)
6. Complete Hydrostatic System to Drive the Augers, Discharge Conveyor and Open the Discharge Door.
7. Plus One Controller with Joystick
8. Two Heavy Duty Gearboxes Complete with Radial Piston Motor
9. Large Discharge Door Located at the Front of the Box
10. 4 - Digistar Weigh Bars with 15,000 lbs. Capacity
11. Two Counter-Knives
12. 18 High Quality Tungsten Vertical Blades (2 Piece) or 18 Busatis Blades or 18 Feedlot Backing Plates (Stainless Steel Lined)
13. Painted White with Blue Trim
14. Reversible Hydraulic Fan with Automatic Self-Cleaning Cycle
15. Thermal Valve for Cold Climates



VT-1500 (F)

VERTICAL TRUCK-MOUNT

[OPTIONS]

1. Mounting on Truck
2. Upgrade floor thickness from ¾" to 1" - Single Auger (Wide Body)
from ¾" to 1" - Twin Auger (Compact Body)
from ¾" to 1" - Twin Auger (Wide Body)
from ¾" to 1" - Triple Auger (Wide Body)
3. Upgrade of Stainless Steel on floor (3mm to 5mm):

Single Screw (Narrow Body)	Twin Screw (Compact Body)	Triple Screw (Wide Body)
Single Screw (Wide Body)	Twin Screw (Narrow Body)	
Single Screw (Extra Wide Body)	Twin Screw (Wide Body)	
4. Stainless Steel Option on Sides (5ft High):

Model:	2mm	2.5mm	3.0mm
VT-600 (Single)			
VT-750 (Single)			
VT-800			
VT-1000			
VT-1200			
VT-1400			
VT-1800			
5. Viewing Platform
6. Rear Door Discharge for Premix
7. Side Door and Slide Chute (per Door)
8. Extra Kicker (Per Auger)
9. Scale Installation
10. Heavy Duty Bumper
11. Rear light and feeding light
12. Mud flaps and hangers
13. Stop, turn, tail and Backup Lights
Stop, turn, tail and Backup Lights (LED Option)
14. 8" Belting Extension:

Single Screws
Twin Screws
Triple Screws
15. 8" Cut Out Option (Per Side)
16. 12" Steel Extension (1/4" Material)
20" Steel Extensions (For VT-1400) (1/4" Material)
17. Camera and Monitor
Extra Camera
18. Base Magnets on Slide Chute (Per Door)
19. Non-Standard Paint Color
Custom-made Decals
20. Door Indicator Gauge:

(For One Door)
Additional Doors (each)



OPTIONS

21. Discharge Extension Option (6 inch)
Discharge Extension Option (12 inch)
Discharge Extension Option (18 inch)
22. Front Mounted Hydrostat Option
23. 6" of Stainless Steel (3mm) Lining on One Auger
6" of Stainless Steel (5mm) Lining on One Auger
24. Complete Stainless Steel (3mm) Lining on One Auger
Complete Stainless Steel (5mm) Lining on One Auger
25. Feedlot Style Folding Spout (No magnets)
Feedlot Folding spout with Full Magnets
Feedlot Folding Spout with ½ magnet/rubber Belt
26. Standard Dogleg Discharge Conveyor (79"+30" incline)
Extended Dogleg Discharge Conveyor (90"+30" incline)
27. UHMW Plastic Rails on Discharge with overhead support brackets
28. C2082H Roller Chain on Discharge (Up-Grade)
29. Upgrade to Bent-Axis Motors –
Single Auger
Twin Auger
Triple Auger
30. Overhead Support Brackets on Discharge
31. Variable Speed Control on Discharge Conveyor



VERTICAL TRUCK-MOUNT

[SPECIFICATION SHEET: VT-600, VT-800, VT-1000, VT-1200, VT-1500, VT-1800]

Customer Name: _____ Company Name: _____

Date: _____ Model: _____

Options		Yes	Price
BASE PRICE			
1	Mounting on Truck		
2	Floor Thickness Upgrade from ____ ¾" to 1" Single Auger 96" ____ ¾" to 1" Twin Auger 88" ____ ¾" to 1" Twin Auger 96" ____ ¾" to 1" Triple Auger 96"		
3	Upgrade Stainless Steel on Floor from 3mm to 5mm		
4	Stainless Steel Option(on the sides 5FT High) ____ 2mm ____ 2.5mm ____ 3.0mm		
5	Viewing Platform		
6	Rear Door Discharge for Premix ____ (50" x 32.5) ____ X-large Door (60" x 32.5")		
7	Side Door and Slide Chute (per door) FRONT: ____ LHS ____ RHS REAR: ____ LHS ____ RHS		
8	Extra Kicker (Per Auger) ____ Front ____ Middle ____ Rear		
9	Scale Installation		
10	Heavy Duty Bumper		
11	Rear light and feeding light		
12	Mud flaps and hangers		
13	Stop, turn, tail and Back-up Lights ____ (LED Option)		
14	8" Belting Extension: ____ Single Screws ____ Twin Screws ____ Triple Screws		
15	8" cut-out Option (Per side)		
16	Steel Extension (1/4" Material) ____ 12" ____ 20" ____ Other		
17	Camera and Monitor ____ Extra Camera ____		
18	Base Magnets on Slide Chute		
19	Non-Standard Paint Color ____ Custom Decals ____		
20	Door Indicator Gauge ____ for one door ____ additional doors		
21	Discharge Extension Option ____ 6" ____ 12" ____ 18"		
22	Front-mounted Hydrostat Option		
23	6" of Stainless Steel Lining on each Auger ____ 3mm ____ 5mm		
24	Complete Stainless Steel Lining on each Auger ____ 3mm ____ 5mm		
25	Feedlot Style Folding Spout ____ No Magnet ____ Full Magnet ____ 1/2 magnet/rubber belt		
26	Dogleg Discharge Conveyor Standard ____ (79" + 30" incline) ____ (90" + 30" incline)		
27	UHMW Plastic Rails on Discharge with overhead support brackets		
28	C2082H Roller Chain on Discharge (Up-Grade) with Chain Guards		
29	Upgrade to Bent-Axis Motors ____ Single Auger ____ Twin Auger ____ Triple Auger		
30	Overhead Support Brackets on Discharge		
31	Variable Speed Control on Discharge Conveyor		
Scale System: Indicator ____ Remote ____ 2nd Remote ____ Other Scale Options ____			
Blade Option: 2-piece ____ Busatis ____ Feedlot Backing Plate ____			
Credit For: ____ No Discharge Conveyor ____ No Front Door ____ No St Steel Liner on Floor			()
Comments:			

Every Laird Product Is *Custom Built* For You.



531 S. Hwy. 59 | Merced, CA 95341
P: (209) 722-4145 | F: (209) 349-8934
sales@lairdmfg.com | www.lairdmfg.com

