



LAIRD

MANUFACTURING

"We are the Exception not the Compromise."

LAIRD FILLER
V-Cat Freestall Filler

[TABLE OF CONTENTS]

TRAILER MOUNTED

VC-1005SP FREESTALL FILLER [TRAILER-MOUNT]	3
<i>DIAGRAM</i>	3
<i>STANDARD EQUIPMENT DETAILS</i>	4
VC-1205SP FREESTALL FILLER [TRAILER-MOUNT]	5
<i>DIAGRAM</i>	5
<i>STANDARD EQUIPMENT DETAILS</i>	6
VC-1405SP FREESTALL FILLER [TRAILER-MOUNT]	7
<i>DIAGRAM</i>	7
<i>STANDARD EQUIPMENT DETAILS</i>	8
VC-1605SP FREESTALL FILLER [TRAILER-MOUNT]	9
<i>DIAGRAM</i>	9
<i>STANDARD EQUIPMENT DETAILS</i>	10
VC-1805SP FREESTALL FILLER [TRAILER-MOUNT]	11
<i>DIAGRAM</i>	11
<i>STANDARD EQUIPMENT DETAILS</i>	12

TRUCK MOUNTED

VC-1205TM FREESTALL FILLER [TRUCK-MOUNT]	13
<i>DIAGRAM</i>	13
<i>STANDARD EQUIPMENT DETAILS</i>	14
VC-1405TM FREESTALL FILLER [TRUCK-MOUNT]	15
<i>DIAGRAM</i>	15
<i>STANDARD EQUIPMENT DETAILS</i>	16
VC-1605TM FREESTALL FILLER [TRUCK-MOUNT]	17
<i>DIAGRAM</i>	17
<i>STANDARD EQUIPMENT DETAILS</i>	18
VC-1805TM FREESTALL FILLER [TRUCK-MOUNT]	19
<i>DIAGRAM</i>	19
<i>STANDARD EQUIPMENT DETAILS</i>	20



"We are the Exception not the Compromise."

LAIRD FREESTALL FILLER V-Cat Freestall Filler Series

[TABLE OF CONTENTS: CONT]


VC-2005TM FREESTALL FILLER [TRUCK-MOUNT]	21
<i>DIAGRAM</i>	21
<i>STANDARD EQUIPMENT DETAILS</i>	22
VC-2205TM FREESTALL FILLER [TRUCK-MOUNT]	23
<i>DIAGRAM</i>	23
<i>STANDARD EQUIPMENT DETAILS</i>	24
OPTIONS	25
SPECIFICATION SHEET	26



VC-1005SP V-CAT FREESTALL FILLER


[TRAILER-MOUNT]

[DIAGRAM]

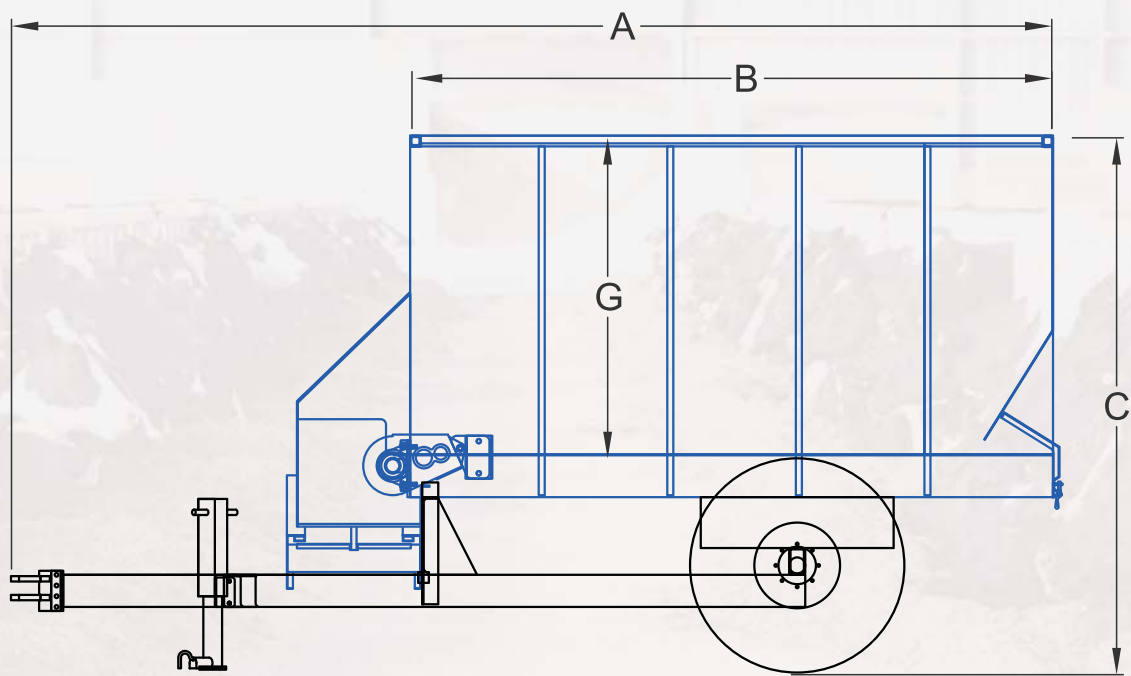

UNIT SPECIFICATIONS		
	NUMBER OF AXLES	1
	VOLUME (CU. YD.)	9.25
A	OVERALL LENGTH	195"
B	CHAMBER LENGTH	120"
C	OVERALL HEIGHT	100"
D	OVERALL WIDTH	87"
E	CHAMBER TOP WIDTH	72 ³ / ₄ "
F	CHAMBER BOTTOM WIDTH	42"
G	CHAMBER DEPTH	60"
H	DISCHARGE CLEARANCE	27"

* 16.5Lx16.1 IMPLEMENT TIRES 4x.

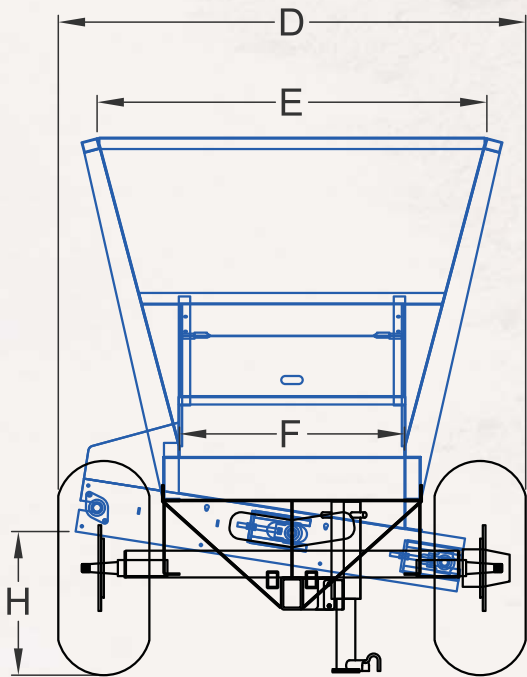

VC-1005SP

VC-1005SP V-CAT FREESTALL FILLER

[TRAILER-MOUNT]

[STANDARD EQUIPMENT]

1. 21" Wide Belt Discharge
2. Discharge on Right Hand Side
3. Discharge Driven by Tractor PTO
4. Hydraulic Gear Box Driven Floor Chain
5. Manual Flow Control for Floor
6. Single Apron WR78 Big Barrel Floor Chain Powered by Tractor
7. Swinging Discharge Door
8. Single Axle with (2) 385/65R X 22.5 Super Single Tires Without Suspension
9. 10,000 lb. Jack and Adjustable Hitch
10. Paint - White with Blue Trim




VC-1005SP

VC-1205SP V-CAT FREESTALL FILLER


[TRAILER-MOUNT]

[DIAGRAM]

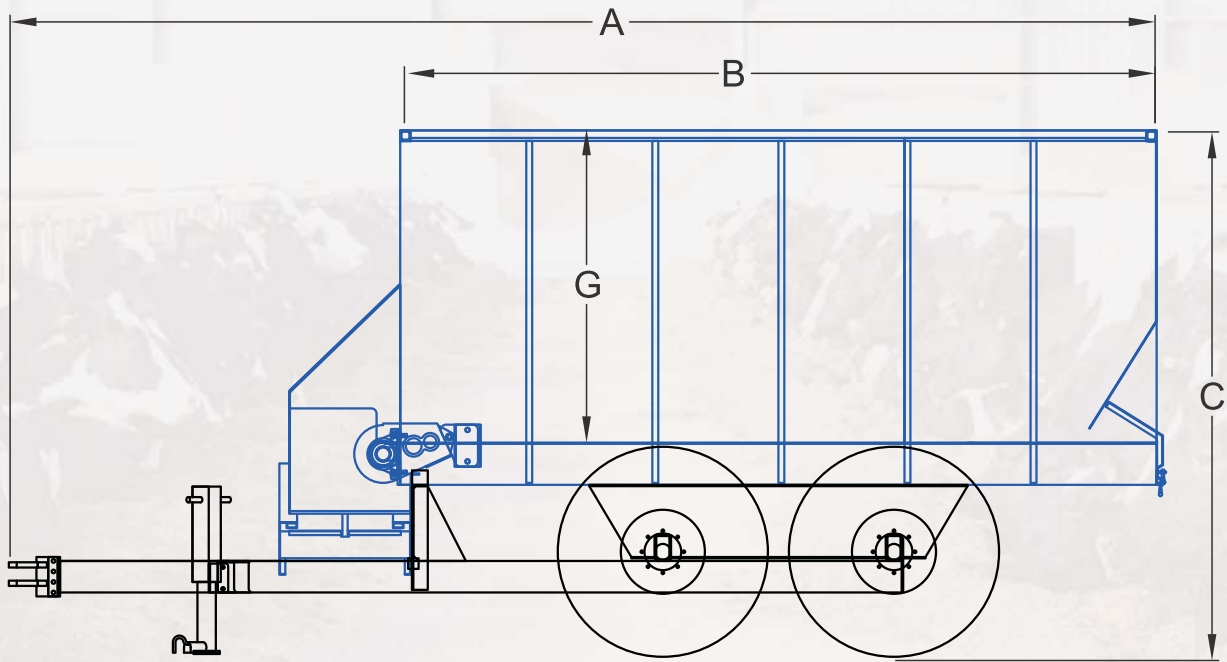

UNIT SPECIFICATIONS		
	NUMBER OF AXLES	2
	VOLUME (CU. YD.)	11.00
A	OVERALL LENGTH	219"
B	CHAMBER LENGTH	144"
C	OVERALL HEIGHT	100"
D	OVERALL WIDTH	87"
E	CHAMBER TOP WIDTH	72 ³ / ₄ "
F	CHAMBER BOTTOM WIDTH	42"
G	CHAMBER DEPTH	60"
H	DISCHARGE CLEARANCE	27"

* 16.5Lx16.1 IMPLEMENT TIRES 4x.

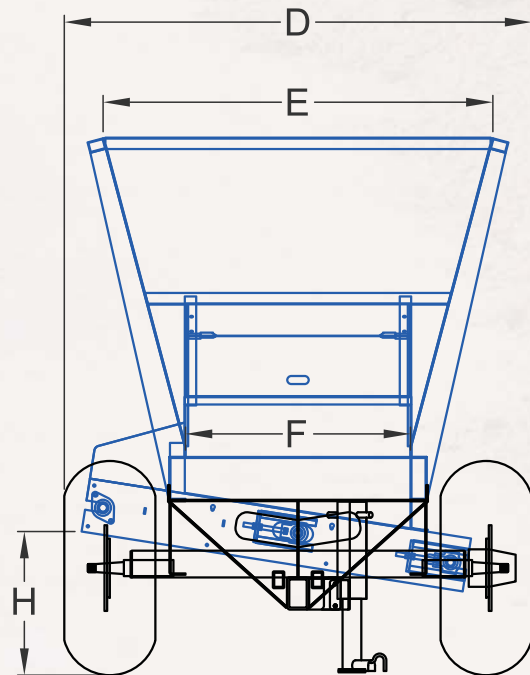

VC-1205SP

VC-1205SP V-CAT FREESTALL FILLER

[TRAILER-MOUNT]

[STANDARD EQUIPMENT]

1. 21" Wide Belt Discharge
2. Discharge on Right Hand Side
3. Discharge Driven by Tractor PTO
4. Hydraulic Gear Box Driven Floor Chain
5. Manual Flow Control for Floor
6. Single Apron WR78 Big Barrel Floor Chain Powered by Tractor
7. Swinging Discharge Door
8. Tandem Axles with (4) 16.5L X 16.1 Implement Tires and 8000lb Hubs & Spindles Without Suspension
9. 10,000 lb. Jack and Adjustable Hitch
10. Paint - White with Blue Trim




VC-1205SP

VC-1405SP V-CAT FREESTALL FILLER


[TRAILER-MOUNT]

[DIAGRAM]

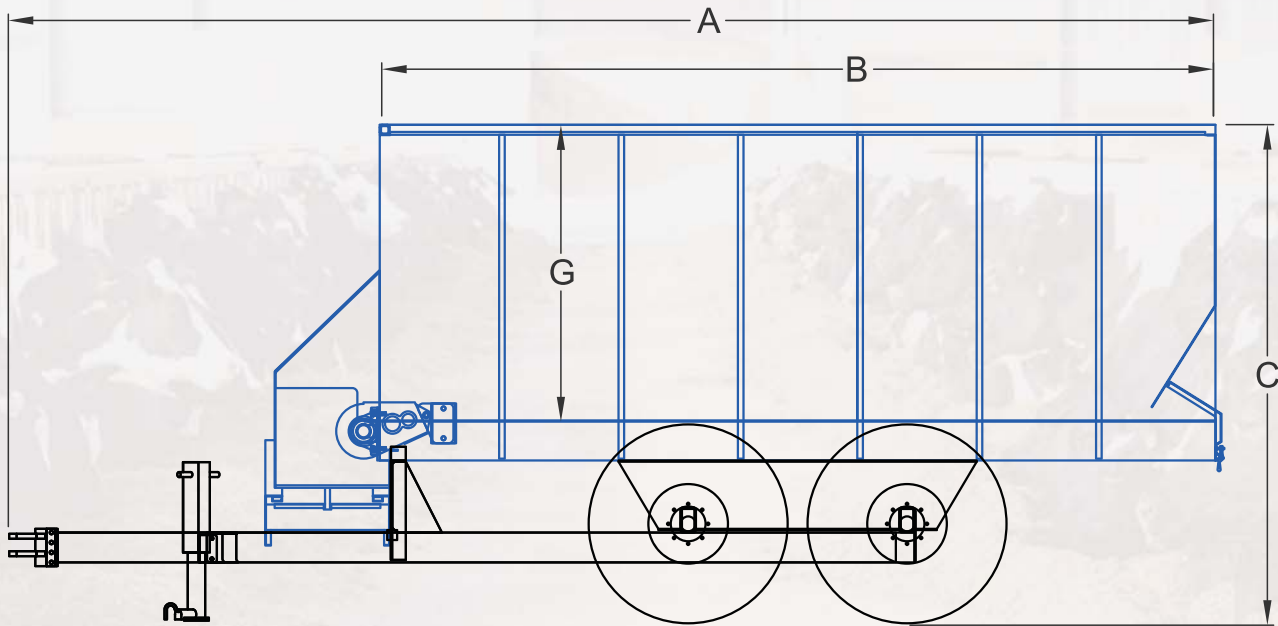

UNIT SPECIFICATIONS		
	NUMBER OF AXLES	2
	VOLUME (CU. YD.)	15.50
A	OVERALL LENGTH	243"
B	CHAMBER LENGTH	168"
C	OVERALL HEIGHT	100"
D	OVERALL WIDTH	87"
E	CHAMBER TOP WIDTH	72 $\frac{3}{4}$ "
F	CHAMBER BOTTOM WIDTH	42"
G	CHAMBER DEPTH	60"
H	DISCHARGE CLEARANCE	27"

* 16.5Lx16.1 IMPLEMENT TIRES 4x.

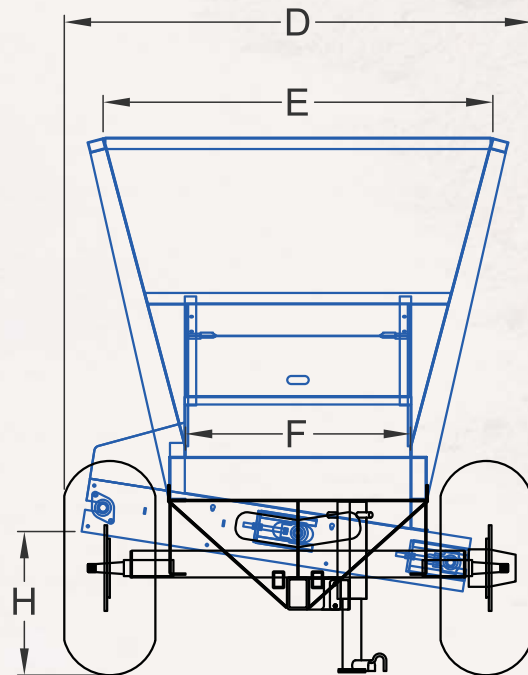

VC-1405SP

VC-1405SP V-CAT FREESTALL FILLER

[TRAILER-MOUNT]

[STANDARD EQUIPMENT]

1. 21" Wide Belt Discharge
2. Discharge on Right Hand Side
3. Discharge Driven by Tractor PTO
4. Hydraulic Gear Box Driven Floor Chain
5. Manual Flow Control for Floor
6. Single Apron WR78 Big Barrel Floor Chain Powered by Tractor
7. Swinging Discharge Door
8. Tandem Axles with (4) 16.5L X 16.1 Implement Tires and 8000lb Hubs & Spindles Without Suspension
9. 10,000 lb. Jack and Adjustable Hitch
10. Paint - White with Blue Trim




VC-1405SP

VC-1605SP V-CAT FREESTALL FILLER


[TRAILER-MOUNT]

[DIAGRAM]

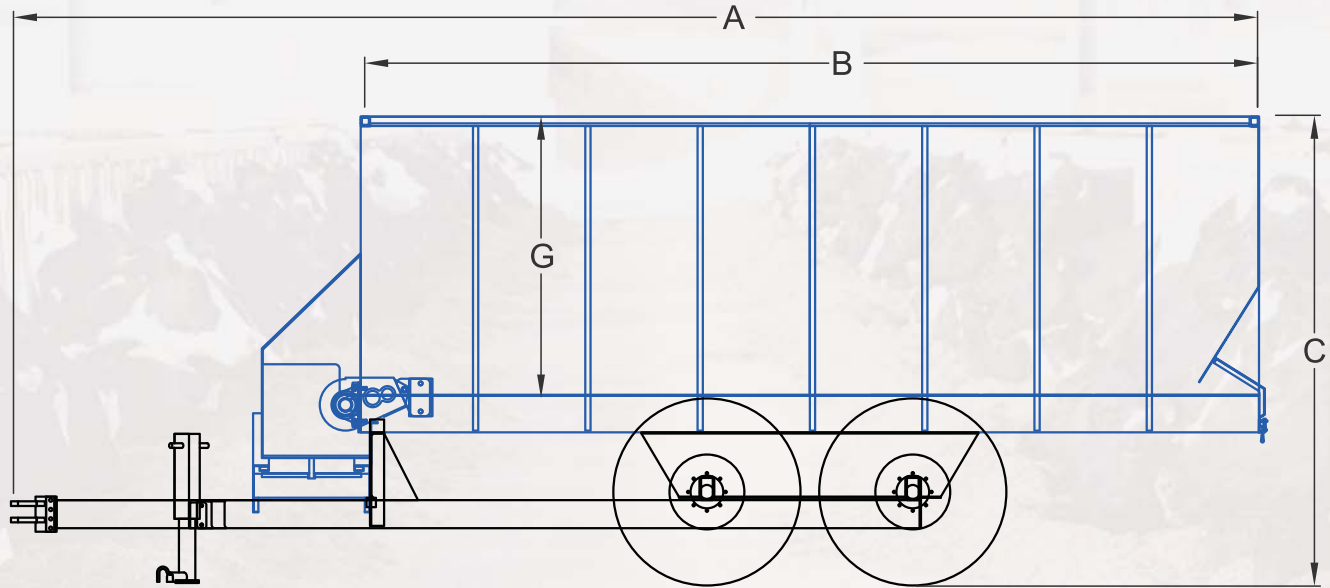

UNIT SPECIFICATIONS		
	NUMBER OF AXLES	2
	VOLUME (CU. YD.)	17.75
A	OVERALL LENGTH	267"
B	CHAMBER LENGTH	192"
C	OVERALL HEIGHT	100"
D	OVERALL WIDTH	87"
E	CHAMBER TOP WIDTH	72 $\frac{3}{4}$ "
F	CHAMBER BOTTOM WIDTH	42"
G	CHAMBER DEPTH	60"
H	DISCHARGE CLEARANCE	27"

* 16.5Lx16.1 IMPLEMENT TIRES 4x.

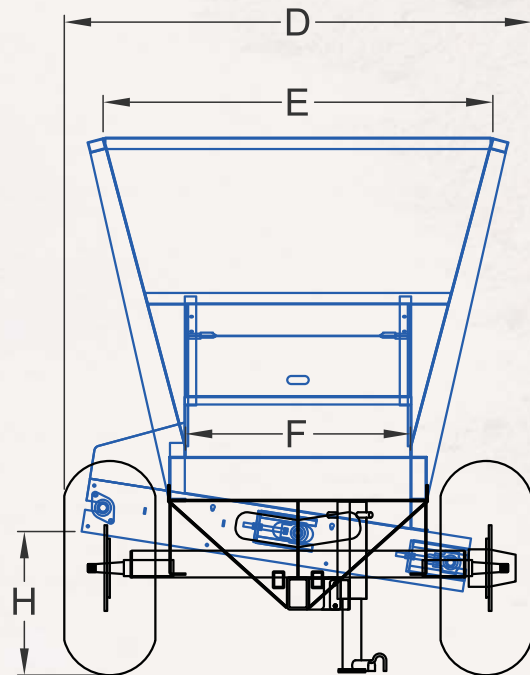

VC-1605SP V-CAT FREESTALL FILLER

[TRAILER-MOUNT]

[STANDARD EQUIPMENT]

1. 21" Wide Belt Discharge
2. Discharge on Right Hand Side
3. Discharge Driven by Tractor PTO
4. Hydraulic Gear Box Driven Floor Chain
5. Manual Flow Control for Floor
6. Single Apron WR78 Big Barrel Floor Chain Powered by Tractor
7. Swinging Discharge Door
8. Tandem Axles with (4) 16.5L X 16.1 Implement Tires and 8000lb Hubs & Spindles Without Suspension
9. 10,000 lb. Jack and Adjustable Hitch
10. Paint - White with Blue Trim




VC-1605SP

VC-1805SP V-CAT FREESTALL FILLER


[TRAILER-MOUNT]

[DIAGRAM]

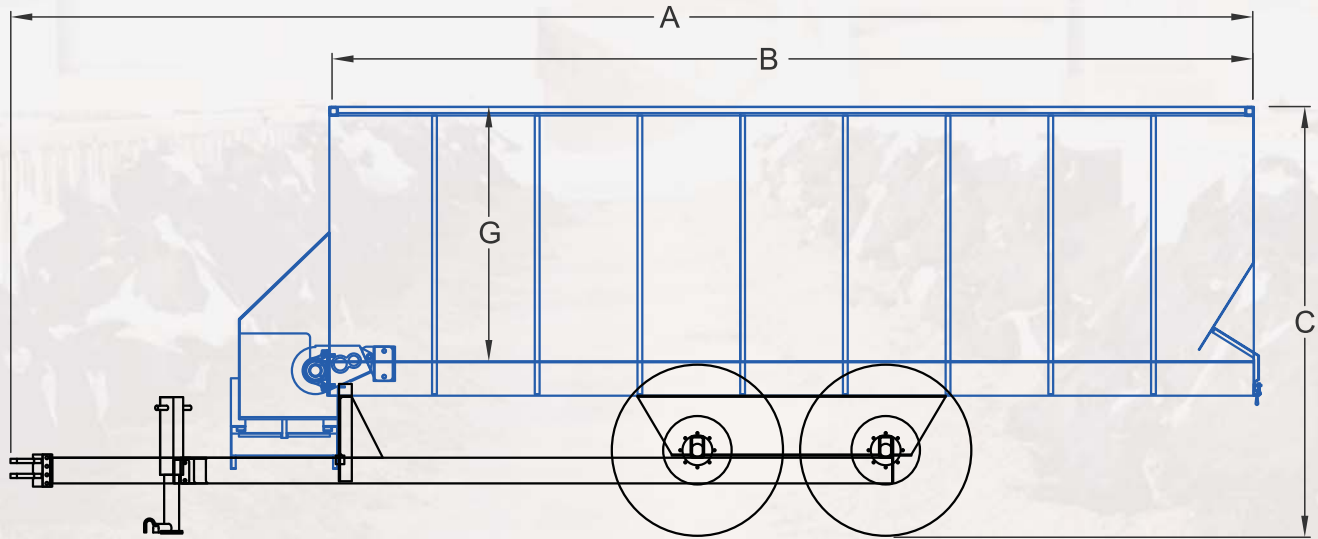

UNIT SPECIFICATIONS		
	NUMBER OF AXLES	2
	VOLUME (CU. YD.)	20.00
A	OVERALL LENGTH	291"
B	CHAMBER LENGTH	216"
C	OVERALL HEIGHT	100"
D	OVERALL WIDTH	87"
E	CHAMBER TOP WIDTH	72 ³ / ₄ "
F	CHAMBER BOTTOM WIDTH	42"
G	CHAMBER DEPTH	60"
H	DISCHARGE CLEARANCE	27"

* 16.5Lx16.1 IMPLEMENT TIRES 4x.

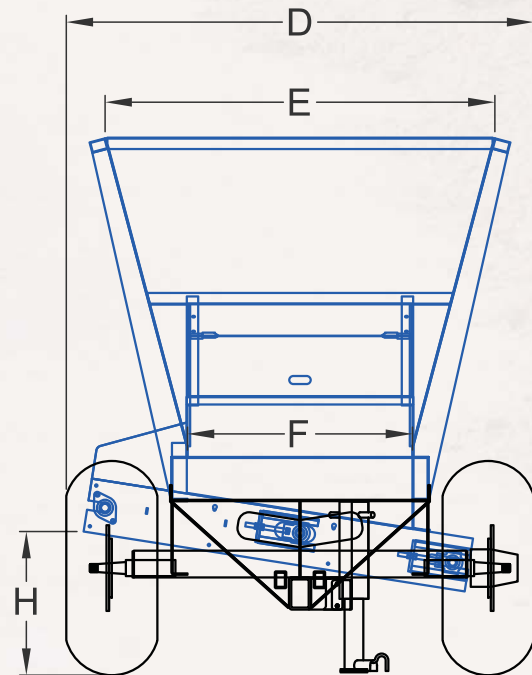

VC-1805SP

VC-1805SP V-CAT FREESTALL FILLER

[TRAILER-MOUNT]

[STANDARD EQUIPMENT]

1. 21" Wide Belt Discharge
2. Discharge on Right Hand Side
3. Discharge Driven by Tractor PTO
4. Hydraulic Gear Box Driven Floor Chain
5. Manual Flow Control for Floor
6. Single Apron WR78 Big Barrel Floor Chain Powered by Tractor
7. Swinging Discharge Door
8. Tandem Axles with (4) 16.5L X 16.1 Implement Tires and 8000lb Hubs & Spindles Without Suspension
9. 10,000 lb. Jack and Adjustable Hitch
10. Paint - White with Blue Trim




VC-1805SP

VC-1205TM V-CAT FREESTALL FILLER


[TRUCK-MOUNT]

[DIAGRAM]

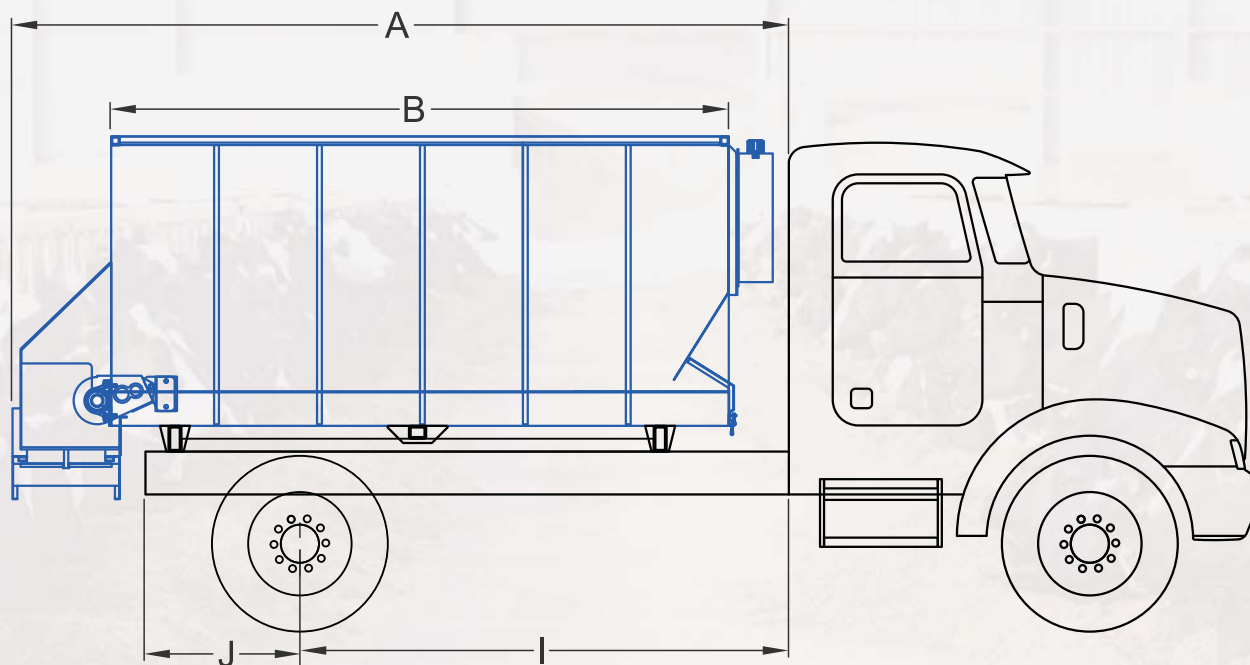

UNIT SPECIFICATIONS		
	NUMBER OF AXLES	1
	VOLUME (CU. YD.)	11.00
A	OVERALL LENGTH	181"
B	CHAMBER LENGTH	144"
C	OVERALL HEIGHT	115½"
D	OVERALL WIDTH	96"
E	CHAMBER TOP WIDTH	72¾"
F	CHAMBER BOTTOM WIDTH	42"
G	CHAMBER DEPTH	60"
H	DISCHARGE CLEARANCE	42"
I	CAB TO TRUNNION	114±3"
J	TRUCK FRAME OVERHANG	36±3"

* All Height Based on 42" Truck Frame.

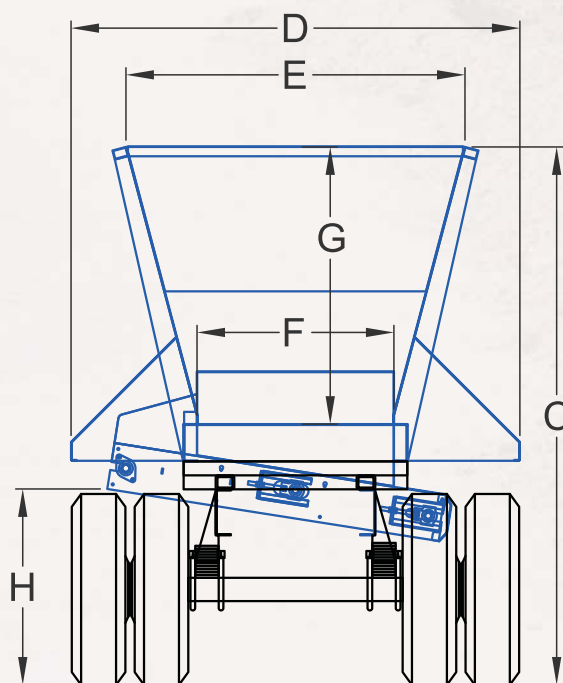

VC-1205TM

VC-1205TM V-CAT FREESTALL FILLER

[TRUCK-MOUNT]

[STANDARD EQUIPMENT]

1. 21" Wide Belt Discharge
2. Discharge on Right Hand Side
3. Hydraulic Driven Discharge
4. Hydraulic Gear Box Driven Floor Chain
5. Electric Flow Control for Floor
6. Single Apron WR78 Big Barrel Floor Chain
7. Swinging Discharge Door
8. Paint - White with Blue Trim




VC-1205TM

VC-1405TM V-CAT FREESTALL FILLER


[TRUCK-MOUNT]

[DIAGRAM]

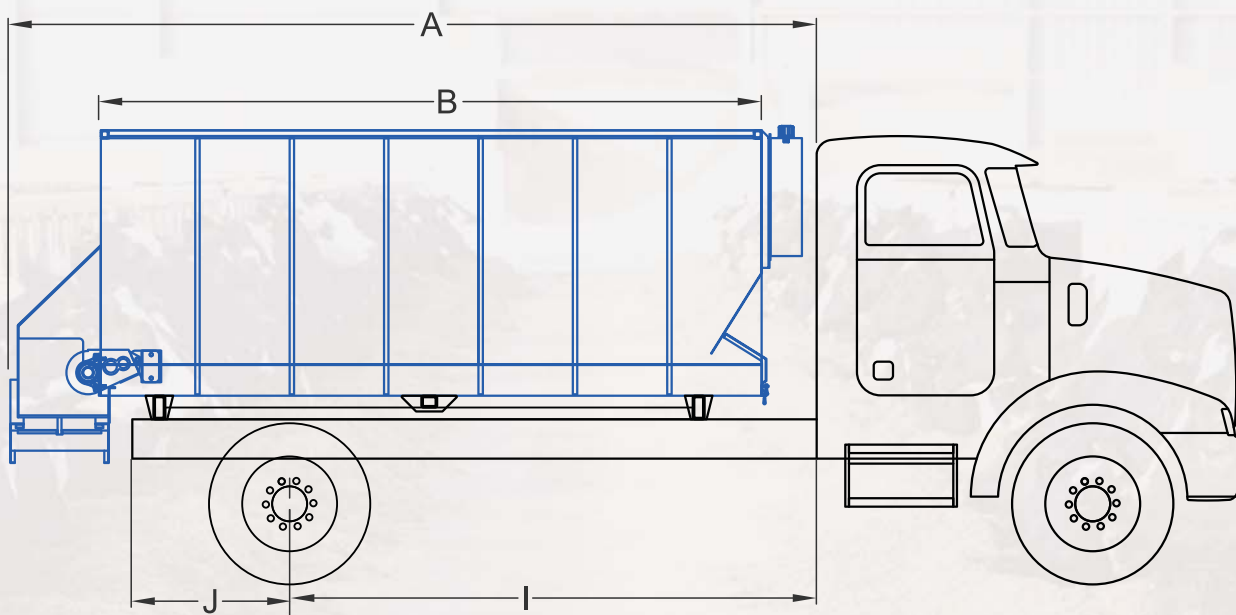

UNIT SPECIFICATIONS		
	NUMBER OF AXLES	1
	VOLUME (CU. YD.)	13.00
A	OVERALL LENGTH	205"
B	CHAMBER LENGTH	168"
C	OVERALL HEIGHT	115½"
D	OVERALL WIDTH	96"
E	CHAMBER TOP WIDTH	72¾"
F	CHAMBER BOTTOM WIDTH	42"
G	CHAMBER DEPTH	60"
H	DISCHARGE CLEARANCE	42"
I	CAB TO TRUNNION	134±3"
J	TRUCK FRAME OVERHANG	40±3"

* All Height Based on 42" Truck Frame.

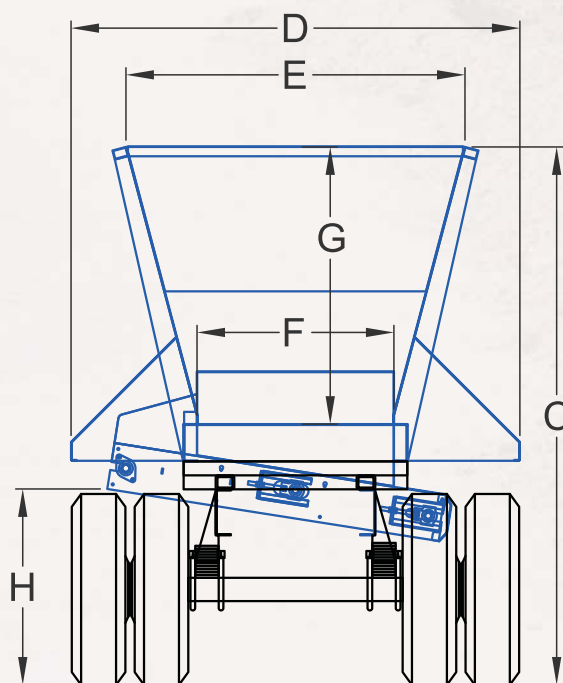

VC-1405TM

VC-1405TM V-CAT FREESTALL FILLER

[TRUCK-MOUNT]

[STANDARD EQUIPMENT]

1. 21" Wide Belt Discharge
2. Discharge on Right Hand Side
3. Hydraulic Driven Discharge
4. Hydraulic Gear Box Driven Floor Chain
5. Electric Flow Control for Floor
6. Single Apron WR78 Big Barrel Floor Chain
7. Swinging Discharge Door
8. Paint - White with Blue Trim




VC-1405TM

VC-1605TM V-CAT FREESTALL FILLER


[TRUCK-MOUNT]

[DIAGRAM]

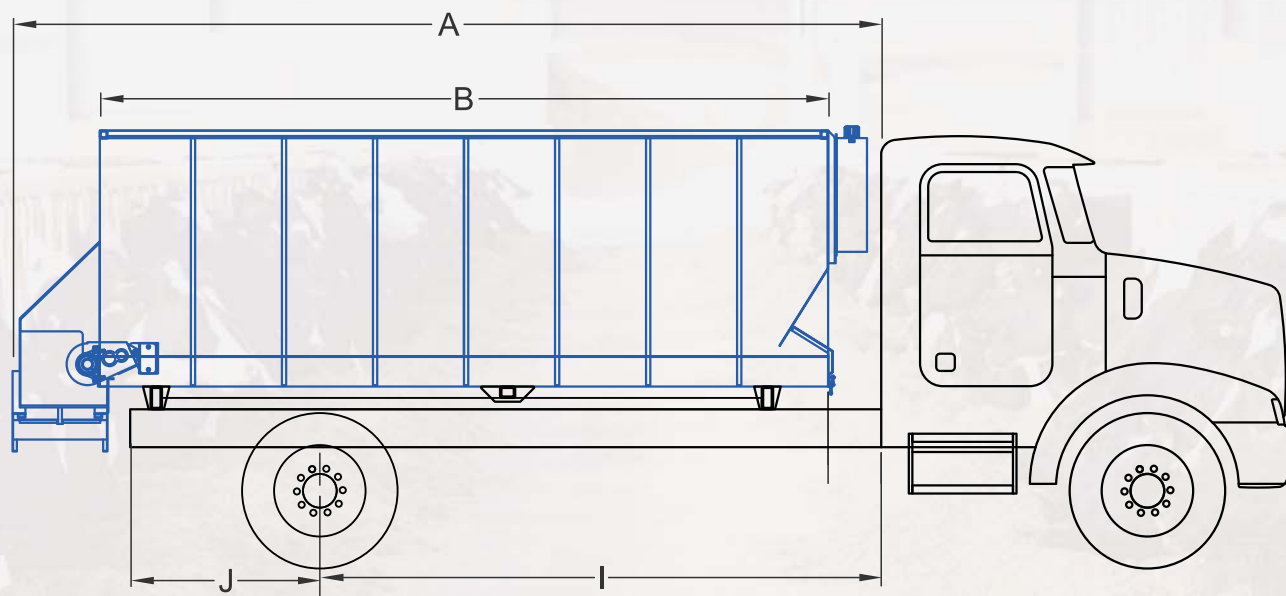

UNIT SPECIFICATIONS		
	NUMBER OF AXLES	1
	VOLUME (CU. YD.)	15.00
A	OVERALL LENGTH	229"
B	CHAMBER LENGTH	192"
C	OVERALL HEIGHT	115½"
D	OVERALL WIDTH	96"
E	CHAMBER TOP WIDTH	72¾"
F	CHAMBER BOTTOM WIDTH	42"
G	CHAMBER DEPTH	60"
H	DISCHARGE CLEARANCE	42"
I	CAB TO TRUNNION	148±3"
J	TRUCK FRAME OVERHANG	50±3"

* All Height Based on 42" Truck Frame.

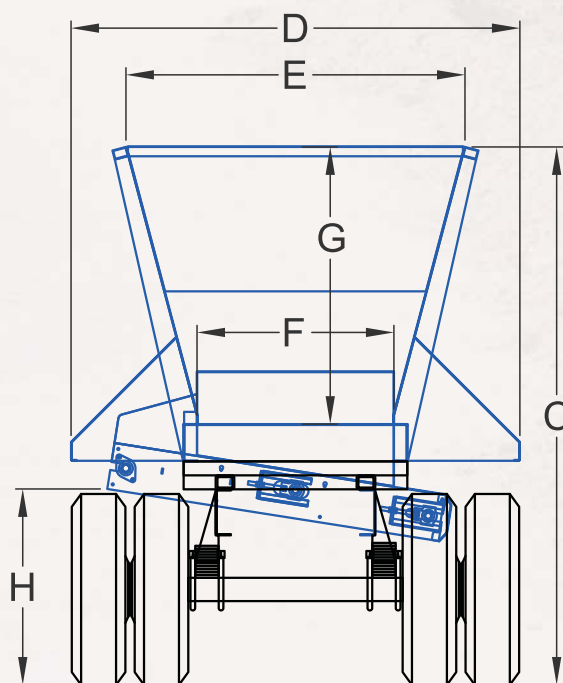

VC-1605TM

VC-1605TM V-CAT FREESTALL FILLER

[TRUCK-MOUNT]

[STANDARD EQUIPMENT]

1. 21" Wide Belt Discharge
2. Discharge on Right Hand Side
3. Hydraulic Driven Discharge
4. Hydraulic Gear Box Driven Floor Chain
5. Electric Flow Control for Floor
6. Single Apron WR78 Big Barrel Floor Chain
7. Swinging Discharge Door
8. Paint - White with Blue Trim




VC-1605TM

VC-1805TM V-CAT FREESTALL FILLER


[TRUCK-MOUNT]

[DIAGRAM]

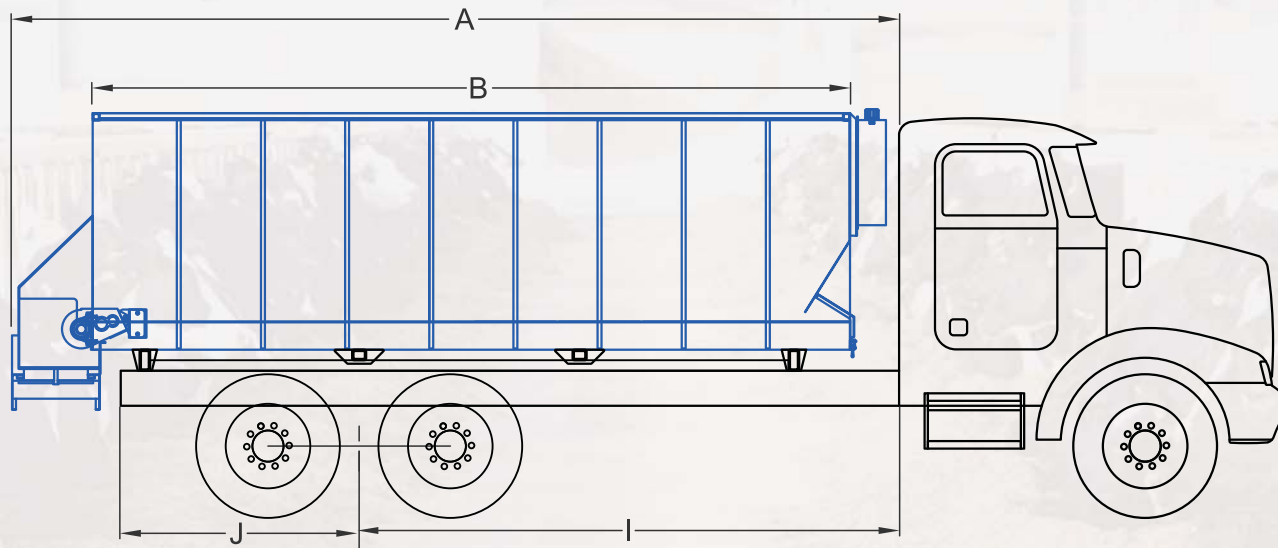

UNIT SPECIFICATIONS		
	NUMBER OF AXLES	2
	VOLUME (CU. YD.)	17.00
A	OVERALL LENGTH	253"
B	CHAMBER LENGTH	216"
C	OVERALL HEIGHT	115½"
D	OVERALL WIDTH	96"
E	CHAMBER TOP WIDTH	72¾"
F	CHAMBER BOTTOM WIDTH	42"
G	CHAMBER DEPTH	60"
H	DISCHARGE CLEARANCE	42"
I	CAB TO TRUNNION	154±3"
J	TRUCK FRAME OVERHANG	68±3"

* All Height Based on 42" Truck Frame.

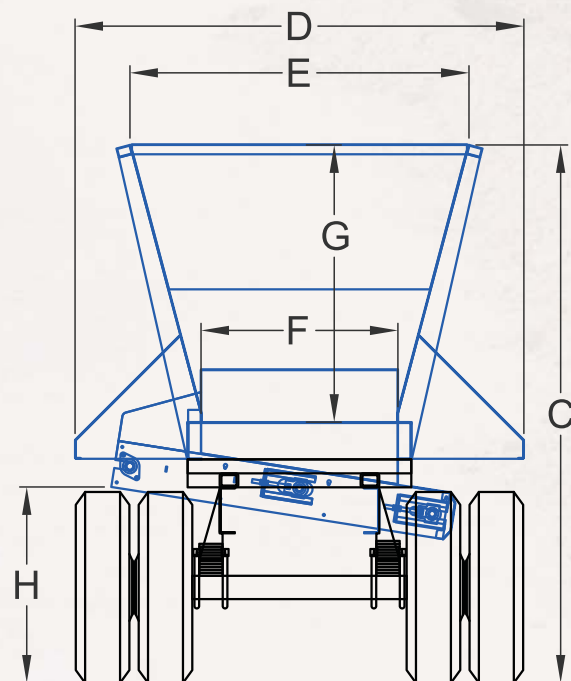

VC-1805TM V-CAT FREESTALL FILLER

[TRUCK-MOUNT]

[STANDARD EQUIPMENT]

1. 21" Wide Belt Discharge
2. Discharge on Right Hand Side
3. Hydraulic Driven Discharge
4. Hydraulic Gear Box Driven Floor Chain
5. Electric Flow Control for Floor
6. Single Apron WR78 Big Barrel Floor Chain
7. Swinging Discharge Door
8. Paint - White with Blue Trim




VC-1805TM

VC-2005TM V-CAT FREESTALL FILLER


[TRUCK-MOUNT]

[DIAGRAM]

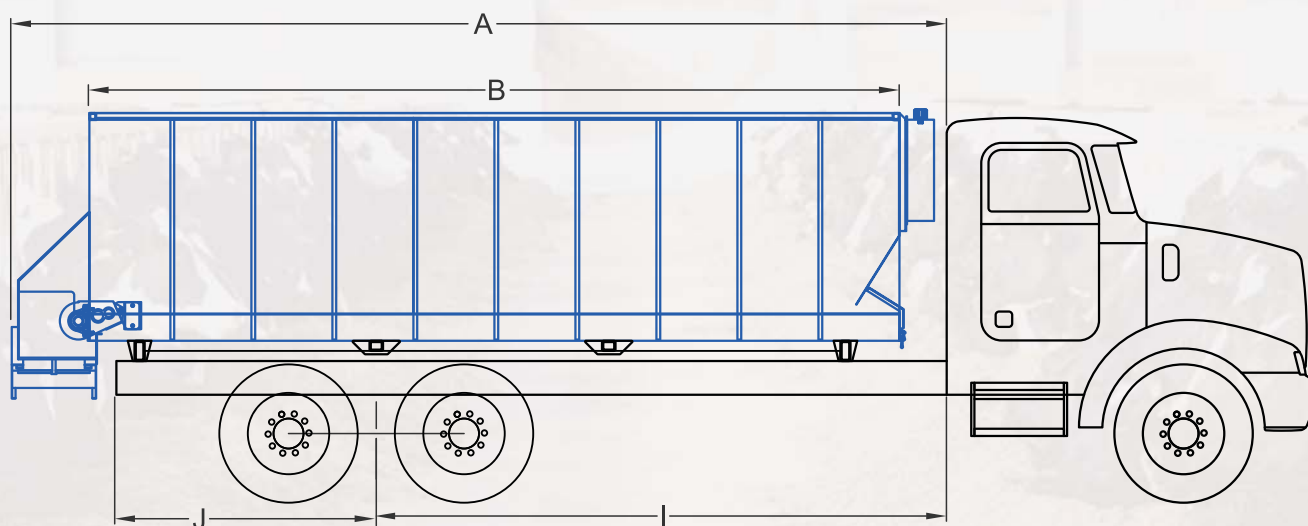

UNIT SPECIFICATIONS		
	NUMBER OF AXLES	2
	VOLUME (CU. YD.)	19.00
A	OVERALL LENGTH	277"
B	CHAMBER LENGTH	240"
C	OVERALL HEIGHT	115½"
D	OVERALL WIDTH	96"
E	CHAMBER TOP WIDTH	72¾"
F	CHAMBER BOTTOM WIDTH	42"
G	CHAMBER DEPTH	60"
H	DISCHARGE CLEARANCE	42"
I	CAB TO TRUNNION	169±3"
J	TRUCK FRAME OVERHANG	77±3"

* All Height Based on 42" Truck Frame.

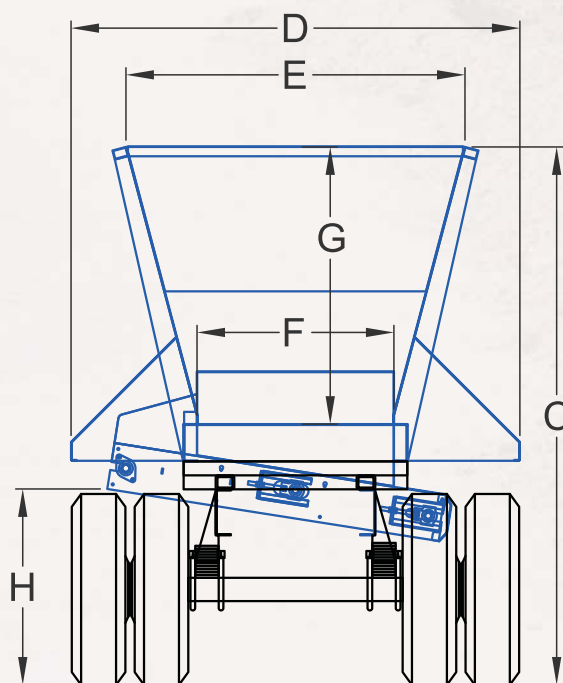

VC-2005TM

VC-2005TM V-CAT FREESTALL FILLER

[TRUCK-MOUNT]

[STANDARD EQUIPMENT]

1. 21" Wide Belt Discharge
2. Discharge on Right Hand Side
3. Hydraulic Driven Discharge
4. Hydraulic Gear Box Driven Floor Chain
5. Electric Flow Control for Floor
6. Single Apron WR78 Big Barrel Floor Chain
7. Swinging Discharge Door
8. Paint - White with Blue Trim




VC-2005TM

VC-2205TM V-CAT FREESTALL FILLER


[TRUCK-MOUNT]

[DIAGRAM]

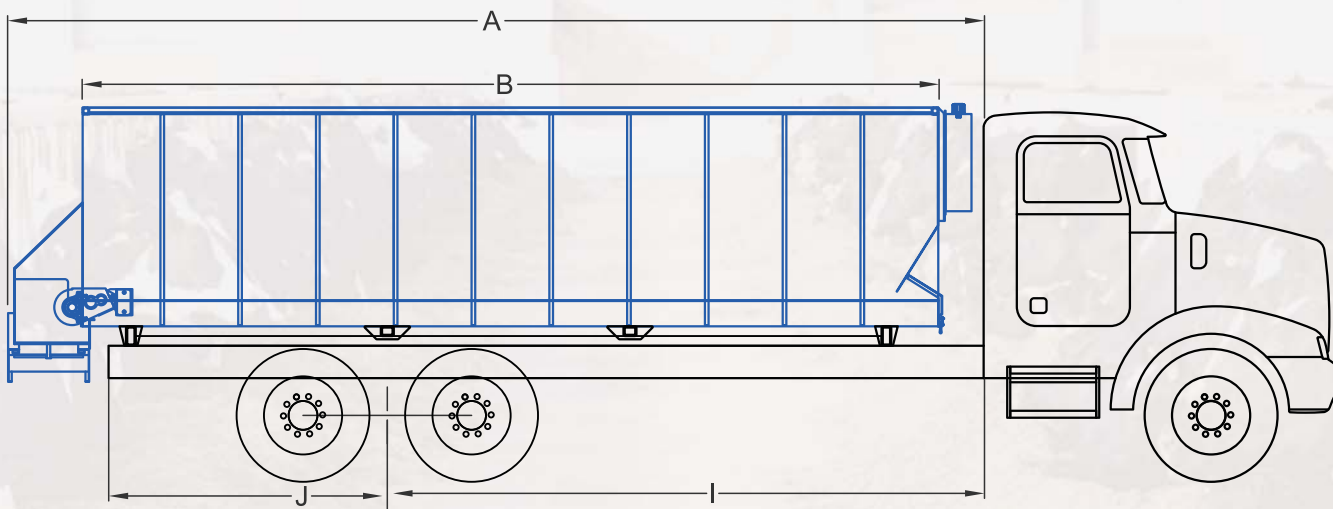

UNIT SPECIFICATIONS		
	NUMBER OF AXLES	2
	VOLUME (CU. YD.)	21.00
A	OVERALL LENGTH	301"
B	CHAMBER LENGTH	264"
C	OVERALL HEIGHT	115½"
D	OVERALL WIDTH	96"
E	CHAMBER TOP WIDTH	72¾"
F	CHAMBER BOTTOM WIDTH	42"
G	CHAMBER DEPTH	60"
H	DISCHARGE CLEARANCE	42"
I	CAB TO TRUNNION	184±3"
J	TRUCK FRAME OVERHANG	86±3"

* All Height Based on 42" Truck Frame.

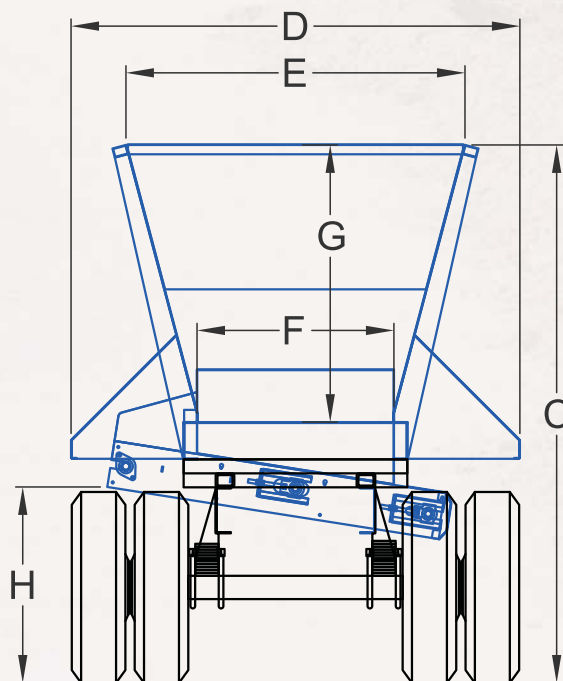

VC-2205TM V-CAT FREESTALL FILLER

[TRUCK-MOUNT]

[STANDARD EQUIPMENT]

1. 21" Wide Belt Discharge
2. Discharge on Right Hand Side
3. Hydraulic Driven Discharge
4. Hydraulic Gear Box Driven Floor Chain
5. Electric Flow Control for Floor
6. Single Apron WR78 Big Barrel Floor Chain
7. Swinging Discharge Door
8. Paint - White with Blue Trim



VC-2205TM

V-CAT FREESTALL FILLER

[OPTIONS]

1. (8) 235/75R X 17.5 Tires on a Tandem Axle with Solid Walking Beam Suspension
2. Tire Options:
 - (8) 275/70R X 22.5
3. Rear Door Option with Rear Drive
4. Non-Standard Paint Color
5. Custom-Made Decal
6. Truck Mount Options Available

OPTIONS

V-CAT FREESTALL FILLER

[SPECIFICATION SHEET]

Customer Name: _____ Company Name: _____

Date: _____ Model: _____

Options		Yes	Price
BASE PRICE			
1.	_____ V-CAT (VC) or _____ Alley-Cat (AC)		
2.	Length of Box _____ Ft.		
3.	Wall Height _____ Ft		
4	Tire Size: _____		
5.	_____ Trailer Mounted or _____ Truck Mounted		
6.	Rear Door Option		
7.	Running Gear : ____ Single Axle ____ Tandem Axle with 8,000 lb. Hubs & Spindles ____ Tandem Axle Single Point Suspension ____ Tandem Axle with Solid Walking Beam Suspension		
8.	Special Paint Color		
9.	Custom Made Decals		

Comments:

Every Laird Product Is *Custom Built* For You.



531 S. Hwy. 59 | Merced, CA 95341
P: (209) 722-4145 | F: (209) 349-8934
sales@lairdmfg.com | www.lairdmfg.com

